



Switching Power Supply Electrical Specification

MODEL : B65E

REV.	Description	Issue Date	Drawn	Mechanical	Electrical	Auditing	Approved
1.0	Initial Release	2018/08/31					



MODEL : B65E

CONTENTS

1. General Requirements.	4
2. Electrical Requirements.	4
2.1 AC Line Input Requirements.	4
2.1.1 Inrush Current Limiting	4
2.1.2 Input Fuse Requirement	4
2.2 DC Output Requirements.	5
2.2.1 DC Output Voltage Regulation.	5
2.2.2 DC Output Load Current Ranges.	5
2.3 Cross Regulation Load Current Is Characteristics:	6
2.4 Ripple & Noise Specification.	6
2.5 Remote Sensing.	7
2.6 Efficiency.	7
2.7 Voltage Hold-up Time	7
3. Output Protection.	7
3.1 Overvoltage Protection.	8
3.2 Short Circuit Protection.	8
3.3 Over Power Protection.	8
4. Power On/Off Timing Requirements.	8
4.1 Remote On /Off.	9
4.2 Rise time.	9
4.3 Power Good Signal.	9
4.4 DC Return to frame connection.	10
4.5 Turn On/Turn Off Delay.	10
4.6 Overshoot at Turn-On/Turn-Off.	10
4.7 Reset after Shut down.	10
5. Mechanical Requirements.	11
5.1 Labeling/Marking	11
5.2 Physical Dimensions	11
5.3 Fan	11
6. Environmental Requirements.	11
6.1 Temperature.	11
6.2 Humidity.	11
6.3 Altitude.	11



6.4 Vibration Test.....	11
6.4.1 Vibration Non-Operating.....	11
6.5 Mechanical Shock.	12
6.5.1 Shock Non-Operating	12
6.6 Cooling and Acoustics.	12
7. EMI.	12
8. Safety Requirements.	12
9. Reliability	12
9.1 M.T.B.F.....	12
9.2 AC Cycles.....	12
10. Production Testing.....	12
10.1 Hi-Pot Test.	12
10.2 Insulation Resistance.....	13
10.3 Leakage Current.....	13
10.4 Earth Grounding Test.....	13



1. General Requirements.

This specification describes a 650 watts, 5 output level power supply. This specification also defines worldwide safety requirements and manufactures process test requirements.

With +5V stand-by and remote ON/OFF control for ATX system.

With Active PFC function to meet EN61000-3-2, class D harmonic current requirement.

2. Electrical Requirements.

The electrical requirements that follow are to be met over the environmental ranges specified in section 6 of this document unless otherwise noted.

2.1 AC Line Input Requirements.

Table 2.1 lists AC input voltage and frequency requirements for continuous operation. The power supply shall be capable of supplying full-rated output power over input voltage ranges rated 200V-240Vac rms nominal.

Input	Min.	Nom.	Max.
Vin (Vrms)	180	200-240	264
Iin (Arms)	--	4.0	--
Frequency (Hz)	47	50	53

Table 2.1 AC Input Line Requirements

2.1.1 Inrush Current Limiting

The inrush current of 200-240Vac ON shall not damage.

2.1.2 Input Fuse Requirement

The power supply shall be protected from primary over current by input fuse rated at 6.3A/250V.

2.2 DC Output Requirements.

2.2.1 DC Output Voltage Regulation.

The DC outputs voltages of the power supply measured at the end of the connectors shall be remain within the regulation ranges shown in Table 2.2.1. The +3.3Vdc output should have provisions for remote sensing to compensate for excessive cable drops. The default sense should be connected to pin 13 of the main power.

Output	Range	Min.	Nom.	Max.	Unit
+5Vdc	±5%	4.75	5.00	5.25	Volts.
+12Vdc	±5%	11.4	12.00	12.6	Volts.
-12Vdc	±10%	-10.8	-12.00	-13.2	Volts.*
+3.3Vdc	±5%	3.14	3.30	3.47	Volts.
+5Vsb	±5%	4.75	5.00	5.25	Volts.

*For total Power 10%-80%

Table 2.2.1 DC Output Voltage Regulation Ranges

2.2.2 DC Output Load Current Ranges.

DC O/P Load	Min. Current	Max. Current	Unit
+5Vdc	0.2	20.0	Amps.
+12Vdc	0.3	50.0	Amps.
-12Vdc	0.0	0.3	Amps.
+3.3Vdc	0.0	20.0	Amps.
+5Vsb	0.0	3.0	Amps.

Table 2.2.2 DC Output Load Current Ranges

Note:

- (1) +5V & +3.3V combined load not exceed 100W, total power rating 650W.
- (2) +12V Total output load over 25A, +5V output load not be under 3Amps.
- (3) +5V output load over 12Amps, +12V output load not be under 3Amps.

2.3 Cross Regulation Load Current Is Characteristics

NO.	LOAD CONDITION	OUTPUT LOAD (A)				
		+5V	+12V	-12V	+3.3V	+5Vsb
1	COND.1	0.2	0.3	0	0.0	0
2	COND.2	5.0	50.0	0.2	5.0	0.1
3	COND.3	10.0	35.0	0.2	10.0	0.5
4	COND.4	15.0	30.0	0.3	10.0	1.0
5	COND.5	20.0	25.0	0.3	0	2.0
6	COND.6	15.0	15.0	0.2	15.0	2.5
7	COND.7	8.0	25.0	0.1	20.0	2.0
8	COND.8	12.5	44.0	0.2	12.5	2.2

Table 2.3 DC Output Current Load Range

2.4 Ripple & Noise Specification.

Output	Max. Ripple & Noise(mV)
+5 Vdc	50
+12 Vdc	120
-12 Vdc	120
+3.3 Vdc	50
+5 Vsb	50

Table 2.4 Ripple & Noise Specification

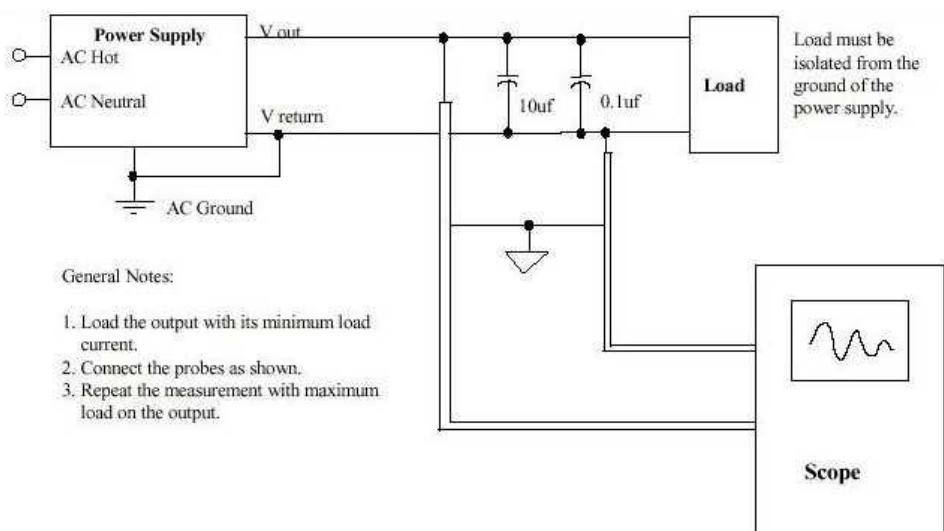


Figure 2.4 Differential Noise Test Setup

Note:

1. Ripple & noise test: The oscilloscope bandwidth is set at 20MHz.
2. Add a 0.1 μ F capacitor in parallel with a 10 μ F tantalum capacitor at output connector terminals for ripple & noise measurements, See Figure 2.4.

2.5 Remote Sensing.

The +3.3Vdc output should have provisions for remote sensing to compensate for excessive cable drops. The default sense should be connected to pin 13 of the main power.

2.6 Efficiency.

The efficiency of the power supply during normal operation shall be 85% minimum measured 230V line input voltage and maximum output loading.

The loading condition for testing efficiency shown in Table 2.6 represents a Full loaded system, a Typical loaded system, and a Light loaded system.

Loading	+5V	+12V	-12V	+3.3V	+5Vsb
Full (A)	10.9	45.23	0.27	10.9	2.71
Typical (A)	5.45	22.61	0.14	5.45	1.1
Light (A)	2.18	9.05	0.05	2.18	0.44

Loading	FULL	Typical	Light
Efficiency %	85%	88%	85%

Table 2.6 Loading table for Efficiency measurements

2.7 Voltage Hold-up Time

The power supply should maintain output regulation per Section 2.1 despite a loss of input power low-end nominal range 230 Vac / 50 Hz—at 50% output load as applicable for a minimum of 16 ms.

3. Output Protection.

If the power supply go into shutdown stage (when OVP, SCP,OPP is working), the power supply shall return to normal operation only after the fault has been removed and remote signal must reset for a minimum of 1 second. Then power supply shall be turn on again.



3.1 Over voltage Protection.(OVP)

The power supply +5Vdc, +3.3Vdc, +12Vdc outputs shall be protected from over voltage condition caused by any single fault of the circuitry or by the injection of external over voltage to the output connectors. The power supply shall be in the latch mode with the over voltage limits defined in Table 3.1.

Output	Nom.	Max.	Unit
+5Vdc	6.3	7.0	Volts
+12Vdc	15.0	15.6	Volts
+3.3Vdc	4.2	4.5	Volts

Table 3.1 Over Voltage Protection Limits

3.2 Short Circuit Protection.(SCP)

A short circuit placed between DC return and output (Approximately 0.1Ω) shall cause no damage and the main output shall shutdown and latch off.

3.3 Over Power Protection.(OPP)

When Over Power Protection (OPP) occurred the power supply will shutdown and Latch-up which can't recovery after removal fault except recycle the AC Line.

The power supply must limit 975W. For testing purposes, the over load currents should be ramped at a minimum rate of 10 A/s starting from full load

4. Power On/Off Timing Requirements.

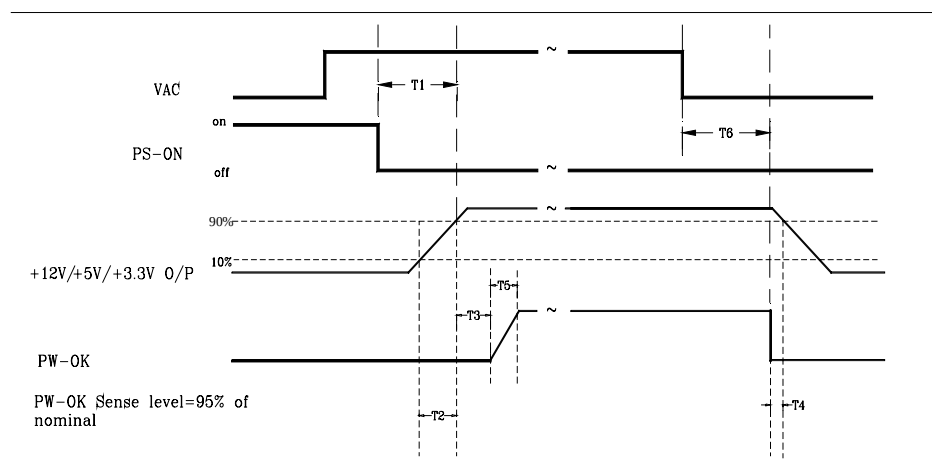


Figure 4.1 Power Supply Timing

4.1 Remote On /Off.

PS_ON# is an active-low, TTL-compatible signal that allows a motherboard to remotely control the power supply in conjunction with features such as soft on/off, Wake on LAN, or wake-on-modem. When PS_ON# is pulled to TTL low, the power supply should turn on the five main DC output rails: +5Vdc, +12Vdc, +3.3Vdc and -12Vdc.

When PS_ON# is pulled to TTL high or open-circuited, the DC output rails should not deliver current and should be held at zero potential with respect to ground. PS_ON# has no effect on the +5VSB output, which is always enabled whenever the AC power is Present. Table 4.1 lists PS_ON# signal characteristics.

The power supply shall provide an internal pull-up to TTL high. The power supply shall also provide debouche circuitry on PS_ON# to prevent it from oscillating on/off at startup when activated by a mechanical switch. The DC output enable circuitry must be SELV-compliant.

	Min.	Max.
VIL, Input Low Voltage	0.0 V	0.8 V
IIL, Input Low Current (Vin = 0.4 V)		-1.6 mA
VIH, Input High Voltage (Iin = -200 μ A)	2.0 V	
VIH open circuit, Iin = 0		5.25 V

Table 4.1 PS-ON# Signal Characteristics

4.2 Rise time.

The +5Vdc and +3.3Vdc output shall rise from 10% to 90% of nominal voltage specified in Section 2.1 within 0.2ms to 20ms maximum.

4.3 Power Good Signal.

PWR_OK is a 'power good' signal. It should be asserted high by the power supply to indicate that the +5Vdc, +12Vdc and +3.3Vdc outputs are above the under voltage thresholds listed in Section 2.1 and that sufficient mains energy is stored by the converter to guarantee continuous power operation within specification for at least the duration specified in Section 2.7, 'Voltage Hold-up Time' Conversely, PWR_OK should be de asserted to a low state when any of the +12Vdc, +5Vdc, or +3.3 Vdc output voltages falls below its under voltage threshold, or when mains power has been removed for a time sufficiently long such that power supply operation cannot be guaranteed beyond the power-down warning time. The electrical and timing characteristics of the PWR_OK signal are given in Table 4.2 and in Figure 4.1.



Signal Type	+5 V TTL compatible
Logic level low	< 0.4 V while sinking 4 mA
Logic level high	Between 2.4 V and 5 V output while sourcing 200 μ A
High-state output impedance	1K Ω from output to common
Power on time	T1 <500ms
PWR_OK delay	100 ms < T3 < 500 ms
PWR_OK rise time	T5 $\leq$ 10 ms
AC loss to DCoutput hold-up time	50% load T6 $\geq$ 16 ms
Power-down warning	T4 $\geq$ 1 ms

Table 4.2 Power Good Signal Characteristics

4.4 DC Return to frame connection.

DC return shall be direct connected to frame ground.

4.5 Turn On/Turn Off Delay.

The turn on delay between the +5Vdc outputs reaching 90% of the specified nominal value and the power good signal (logic high) shall be 100ms to 500ms under any combination of operating line and load conditions specified in Section 2.1 and 2.2.2.

The turn off delay between the power good signal (logic low) and the +5Vdc outputs drop out of the regulation limit shall be 1ms minimum under any combination of operating line and load conditions specified in Section 2.1 and 2.2

4.6 Overshoot at Turn-On/Turn-Off.

The output voltage overshoot upon the application or removal of the input voltage, or the assertion/Reassertion of PS_ON#, under the conditions specified in Section 2.2, shall be less than 10% above the nominal voltage. No voltage of opposite polarity shall be present on any output during turn-on or turn-off.

4.7 Reset after Shut down.

If the power supply latches into a shutdown state because of a fault condition on its outputs, the power supply shall return to normal operation only after the fault has been removed and the PS_ON# (or AC input) has been cycled OFF/ON with a minimum OFF time of 3 second.

5. Mechanical Requirements.

5.1 Labeling/Marking

Each supply shall be marked with the following, at minimum:

Manufacturer information: manufacturer's name, part number, and lot date code in human-readable text format, etc.

Nominal AC input operating voltages (200-240Vac) and current rating certified by all agencies specified in Section 2.

DC output voltages and current ratings.

5.2 Physical Dimensions

The overall dimension of this power supply is 140mm(L) × 150mm(W) × 86mm(H).

5.3 Fan

A 120 mm fan is used.

6. Environmental Requirements.

6.1 Temperature.

Operating ambient	+0°C Minimum to +40°C Maximum.
Storage shipping ambient	-40°C Minimum to +70°C Maximum.

6.2 Humidity.

Operating	5% to 85% relative humidity (non-condensing)
Non-operating	5% to 95% relative humidity (non-condensing)

Note: 95% RH is achieved with a dry bulb temperature of 55 °C and a wet bulb temperature of 54°C

6.3 Altitude.

Operate properly at any altitude between 0 to 7000 ft.

6.4 Vibration Test.

6.4.1 Non-Operating

0.01g² / Hz at 5 Hz, sloping to 0.02g² / Hz at 20 Hz, and maintaining 0.02g² / Hz from 20Hz to 500Hz. The area under the PSD curve is 3.13 g RMS. The duration shall be 10 minutes per axis for all three axes on all samples.



6.5 Mechanical Shock.

6.5.1 Non-Operating

50 g, trapezoidal input ; velocity change. ≥ 170 in/s

Three drops on each of six faces are applied to each sample.

6.6 Cooling and Acoustics.

The power supply has provided forced air-cooling included fan control circuit for the host system.

7. EMI.

The power supply shall comply with CE Class B .

8. Safety Requirements.

This power supply is designed can meet the following spec.

- 1). CB
- 2). TUV

9. Reliability

9.1 M.T.B.F

The calculated M.T.B.F shall be 100,000 hours of continuous operation at 25°C , 85% Load, 80% confidence limit and nominal line. The M.T.B.F of the power supply shall be calculated in accordance with BELLCORE. The DC fan is not included.

9.2 AC Cycles

The power supply shall also withstand a minimum of 10000 on/off cycles of and normal input line voltage using the Remote on/off feature.

10. Production Testing.

10.1 Hi-Pot Test.

Primary to secondary: 1500Vac for 3 second.

Primary to safety ground: 1500Vac for 3 second.



10.2 Insulation Resistance.

Primary to safety ground: 500Vdc, 25M Ω minimum.

10.3 Leakage Current.

3.5mA maximum at 240Vac 50Hz.

10.4 Earth Grounding Test.

0.1 Ω maximum at 25A.

S/N:

訂單號										訂單 項次		產品流水碼				
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
										項次						

主Label

W75xH120mm

BE SERIES 450W

B45E

Switching Power Supply | 交换式电源供应器

MODEL / 型号		B45E					
AC INPUT / 交流输入		200-240Vac, 4A, 50-60Hz					
DC OUTPUT 直流输出	OUTPUT VOLTAGE 输出电压	+12V	+5V	+3.3V	-12V	+5VSB	
	MAX OUTPUT CURRENT 最大输出电流	36A	20A	20A	0.3A	3A	
	MAX COMBINED POWER 最大功率	432W	100W	3.6W	15W		
	TOTAL OUTPUT POWER 总输出功率	450W					

警告 / CAUTION / PRUDENCE

HAZARDOUS AREA | ZONE DANGEREUSE
内有高压，请勿开启

Do not remove this cover. Trained service people only.
No serviceable components inside.

Ne pas retirer ce couvercle. Seulement les gens de service formés.
Aucun composant réparable à l'intérieur.

80 PLUS
BRONZE
230V EU

TUV SUD

CBCECCC

10

Pb-free

仅适用于海拔2000m以下地区使用 | 中国制造 | MADE IN CHINA
制造商：迎广科技股份有限公司

迎广科技

inwin

CONTEMPORARY & INNOVATIVE

BE SERIES 550W

B55E

Switching Power Supply | 交换式电源供应器

MODEL / 型号		B55E					
AC INPUT / 交流输入		200-240Vac, 4A, 50-60Hz					
DC OUTPUT 直流输出	OUTPUT VOLTAGE 输出电压	+12V	+5V	+3.3V	-12V	+5VSB	
	MAX OUTPUT CURRENT 最大输出电流	42A	20A	20A	0.3A	3A	
	MAX COMBINED POWER 最大功率	504W	100W	3.6W	15W		
	TOTAL OUTPUT POWER 总输出功率	550W					

警告 / CAUTION / PRUDENCE

HAZARDOUS AREA | ZONE DANGEREUSE
内有高压，请勿开启

Do not remove this cover. Trained service people only.
No serviceable components inside.

Ne pas retirer ce couvercle. Seulement les gens de service formés.
Aucun composant réparable à l'intérieur.

80 PLUS
BRONZE
230V EU

TUV SUD

CBCECCC

10

Pb-free

仅适用于海拔2000m以下地区使用 | 中国制造 | MADE IN CHINA
制造商：迎广科技股份有限公司

迎广科技

inwin

CONTEMPORARY & INNOVATIVE

BE SERIES 650W

B65E

Switching Power Supply | 交换式电源供应器

MODEL / 型号		B65E					
AC INPUT / 交流输入		200-240Vac, 4A, 50-60Hz					
DC OUTPUT 直流输出	OUTPUT VOLTAGE 输出电压	+12V	+5V	+3.3V	-12V	+5VSB	
	MAX OUTPUT CURRENT 最大输出电流	50A	20A	20A	0.3A	3A	
	MAX COMBINED POWER 最大功率	600W	100W	3.6W	15W		
	TOTAL OUTPUT POWER 总输出功率	650W					

警告 / CAUTION / PRUDENCE

HAZARDOUS AREA | ZONE DANGEREUSE
内有高压，请勿开启

Do not remove this cover. Trained service people only.
No serviceable components inside.

Ne pas retirer ce couvercle. Seulement les gens de service formés.
Aucun composant réparable à l'intérieur.

80 PLUS
BRONZE
230V EU

TUV SUD

CBCECCC

10

Pb-free

仅适用于海拔2000m以下地区使用 | 中国制造 | MADE IN CHINA
制造商：迎广科技股份有限公司

迎广科技

inwin

CONTEMPORARY & INNOVATIVE

■ 四色黑

■ K40%

■ M50%+Y100%+K50%

側Label

W136xH25mm



- 四色黑
- 50% black
- 40% black
- M50%+Y100%+50%black