



msi

MOTHERBOARDS

MAG B660M BAZOOKA DDR4

CONQUER THE BATTLEFIELD



SPECIFICATIONS

Model Name	MAG B660M BAZOOKA DDR4
CPU Support	Supports 12 th Gen Intel® Core™ Processors, Pentium® Gold and Celeron® Processors
CPU Socket	LGA 1700
Chipset	Intel® B660 Chipset
Graphics Interface	1x PCIe 4.0 x16 slot, 1x PCIe 3.0 x16 slot Support AMD® CrossFire™ Technology
Display Interface	Support 4K@60Hz as specified in HDMI 2.1, DisplayPort 1.4 - Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR4-4800+ (OC)
Expansion Slot	1x PCIe 3.0 x1 slot
Storage	2x M.2 Gen4 x4 64Gbps slots, supports Intel® Optane™ Technology 4 x SATA 6Gb/s
USB ports	2x USB3.2 Gen2 10Gbps (2 Type-A), 5x USB 3.2 Gen1 5Gbps (4 Type-A + 1 Type-C), 6x USB 2.0
LAN	Realtek® RTL8125BG 2.5Gbps LAN
Audio	8-Channel (7.1) HD Audio with Audio Boost

FEATURES



Extended Heatsink Design

MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.



Lightning Gen4 Solution

The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.



Memory Boost

Advanced technology to deliver pure data signals for the best performance, stability and compatibility.



Core Boost

With premium layout and fully digital power design to support more cores and provide better performance.



2.5G Network Solution

Featuring premium 2.5G LAN with LAN manager to deliver better network experience.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



M.2 SHIELD FROZR


Onboard M.2 thermal solution to keep M.2 SSDs safe while preventing throttling, making them run cooler & faster.



2oz Thickened Copper PCB

An enhanced PCB design improves heat dissipation and performance reliability.

CONNECTIONS

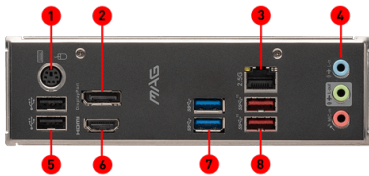

- | | |
|-------------------------------|--------------------------------|
| 1. Keyboard / Mouse | 2. DisplayPort |
| 3. 2.5G LAN | 4. Audio Connectors |
| 5. USB 2.0 | 6. HDMI |
| 7. USB 3.2 Gen 1 5Gbps Type-A | 8. USB 3.2 Gen 2 10Gbps Type-A |