

MARS 970 PLUS PCIe Gen5 x4 M.2 2280 SSD

TOO FAST TO FIGHT BACK

XPG MARS 970 PLUS PCIe Gen5 x4 M.2 2280 Solid State Drive

Engineered for laptops and mini-PCs, the MARS 970 PLUS PCIe 5.0 SSD delivers a staggering 11,000/10,000MB/s sequential read/write. Crush latency and unlock peak performance in AI workloads and gaming. With 2TB capacity, new-gen thermal efficiency, and support for the latest Intel/AMD platforms, this is the upgrade you need to win.

Features

- The gaming laptop-ready PCIe 5.0 SSD
- PCIe Gen5 x4 transmission interface
- R/W speed up to 11,000/10,000MB/s
- Capacity up to 2TB
- Thin profile—
no extra large heatsinks or active cooling required
- Supports latest Intel and AMD platforms
- SLC Caching and Host Memory Buffer
- Pyrite encryption support
- Advanced LDPC ECC Technology

Ordering Information

Capacity	Model Number	EAC Code / UPC Code
2TB	SMAR-970PL-2TCS	4711658154354
		842243037166
1TB	SMAR-970PL-1TCS	4711658154347
		842243037159



Specifications

- Capacities: 2TB / 1TB
- NAND Flash: 3D NAND
- Interface: PCIe Gen5 x4
- Form Factor: M.2 2280
- Sequential read/write (Max.):
Up to 11,000/10,000MB/s
- Operating Temperature: 0°C~70°C
- Storage Temperature: -40°C~85°C
- Shock Resistance: 1500G/0.5ms
- Weight:
 - 10g / 0.35oz (with heatsink)
 - 6g / 0.21oz (without heatsink)
- Dimensions (L x W x T):
 - 80 x 22 x 3.9mm (with heatsink)
 - 80 x 22 x 2.6mm (without heatsink)
- Terabytes Written (TBW)(Max. capacity): 1,200TB
- MTBF: 2,000,000 hours
- Warranty: 5-year limited
- Certifications: CE, FCC, BSMI, KC, Morocco, EAC, RCM, RoHS

Performance

Capacity	Sequential Performance (Up to)		TBW
	Read (MB/s)	Write (MB/s)	
2TB	11,000	10,000	1,200TB
1TB	10,500	9,500	600TB

¹ Platform Information: M/B: ASUS ROG CROSSHAIR X670E HERO, CPU: AMD Ryzen 9 7950X3D 16-Core Processor 4.2GHz, BIOS Ver: 2604 x64, DRAM: DDR5 16GB*2 4800MHz, OS Ver: Windows 11 / 24H2


² Speed test by Crystal Disk Mark 8.0.4 x64

³ The value is the minimum amount of terabyte written that could be reached.

⁴ Performance may vary based on SSD capacity, hardware test platform, test software, operating system and other system variables

Schematics

<With heatsink>

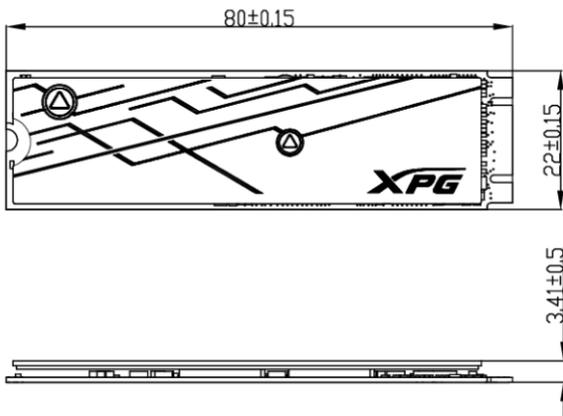

<Without heatsink>

