


Designed with Aluminum Diecast



525.8 mm



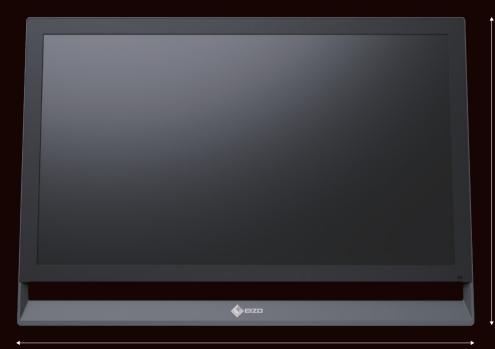

# Features for Video Entertainment

### Small-Footprint OLED Monitor

FORIS NOVA incorporates a 21.6-inch OLED panel with a 4K UHD (3840 x 2160) resolution supporting HDR10 and HLG. The compact OLED monitor saves space compared to a typical OLED TV, for a more comfortable video viewing environment.

## High Contrast & Wide Viewing Angle

The monitor offers an incredible high contrast ratio of 1,000,000:1 for producing deep blacks that are otherwise difficult to display on a typical LCD monitor. Dark tones retain their depth when viewed from an angle, even in a dimly lit room.



### Power to SDI Converter

FORIS NOVA comes with a DC output terminal (5V / 2.1A) which supplies power to an SDI to HDMI converter.


### PQ Gamma Curve

The PQ Hard Clip Mode follows the PQ gamma curve and clips the brightness at 330 cd/m² without tone mapping. With two additional preset modes, the PQ gamma curve is compressed to fit within 330 cd/m² with a peak brightness of 1000 cd/m² or 4000 cd/m². This makes it ideal for viewing HDR content. You can switch modes easily using the remote control.

#### Wide Color Gamut

The wide color gamut faithfully reproduces 80% of the BT.2020 color space, displaying 1.07 billion colors (10-bit tones).






#### Specifications

Panel	Туре	OLED
	Size	21.6" / 54.9 cm
	Native Resolution	3840 x 2160 (16:9 aspect ratio)
	Viewable Image Size (H x V)	478.1 x 268.9 mm
	Pixel Density	204 ppi
	Display Colors	1.07 billion
	Viewing Angles (H / V, typical)	178° / 178°
	Brightness (typical)	330 cd/m² (peak), 132 cd/m² (typ.)
	Contrast Ratio (typical)	1,000,000:1
	Response Time (typical)	0.04 ms (black-white-black)
	Color Gamut (typical)	BT.2020: 80%
Video Signals	Input Terminals	HDMI x 2 (Deep Color, HDCP 2.2 / 1.4)
	HDR Format	HDR10, HLG
Audio	Speakers	1.0 W + 1.0 W (stereo)
	Output Terminals	Headphones (Stereo mini jack)
		Line out (Stereo mini jack)
Power	Power Requirements	100 - 240 V, 50 / 60 Hz
	Power Supply	DC5 V / 2.1 A
Features & Functions	Preset Modes	User1, User2, User BLA, sRGB
Physical Specifications	Dimensions (Landscape, W x H x D)	525.8 x 318.5 - 358.5 x 139.7 - 285.0 mm
	Net Weight	3.2 kg
	Tilt	11° - 30°
	Hole Spacing (VESA Standard)	-
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	HDMI (2 m)
	Others	AC power cord (2 m), AC adapter, remote control
		with battery (CR2032 x 1), introduction sheet
Warranty		Three Years
		Zero bright sub-pixels for six months from date of
		purchase.

- With current LCD / OLED technology, a panel may contain a limited number of missing or flickering pixels.
- If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.

#### ■ Dimension Diagrams (Unit:mm)





#### Characteristic of OLED and Recommended Usage

The subpixels in an OLED monitor are made up of organic light-emitting diodes (OLED) which emit red, green and blue light in response to an electric current. Controlling the lighting of each of these subpixels allows images to be displayed.

If a pixel remains lit for an extended period without changing, the luminance performance may deteriorate causing image burn-in.

Below is the recommended usage of FORIS NOVA to encourage long product life.

- · Use the screen saver and power save features in the device connected to the monitor.
- Turn off the monitor when it is not in use.

Austria | www.eizo.at

Belgium | www.eizo.be

Czech Republic | www.eizo.cz

United Kingdom | www.eizo.co.uk

Germany | www.eizo.de Hungary | www.eizo.hu Italy | www.eizo.it The Netherlands | www.eizo.nl Nordics | www.eizo.se Slovakia | www.eizomonitor.sk

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, and FORIS are registered trademarks of EIZO Corporation in Japan and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. VESA is a registered trademark of Video Electronics Standards Association. Specifications are subject to change without notice.