

IPC PSU

Twins 500W Modular



Model:FSP520-20RGHBB1



Specification

- Complies with ATX12 v2.4 & EPS12 v2.92
- Efficiency $\geq 90\%$ @ typical Load
- Active PFC ≥ 0.9
- Hold up time > 17ms @80% Load
- +12V Single-Rail Design
- 40mm 2ball Long life Fan
- Complete Protections: OCP/OVP/OPP/SCP

Rating Information

		Model No. (型號 / 型号 / 모델명): FSP520-20RGHBB1	
AC Input 交流輸入 / 交流輸入 / 정격입력	100-240V~, 8-4A, 60-50Hz		
DC Output 直流輸出 / 直流輸出 / 정격출력	+12V \equiv 43.3A	+5Vsb \equiv 3.0A	
Total Power 額定功率 / 額定功率	520W		

SWITCHING POWER SUPPLY
 Caution! Don't remove the cover by yourself! Fixing has to be done by qualified personnel only. No parts were used that need any maintenance.
 Attention! Veuillez ne pas ouvrir le bloc. Seul du personnel qualifié est habilité à effectuer des réparations. Les composants utilisés ne nécessitent aucun entretien.

交換式電源供應器
 注意：請勿自行開啟電源外殼，否則不予保固！
 开关電源供應器
 注意：勿自行开启电源外壳，否则不予质保！

FSP TECHNOLOGY INC.
 NO. 22, Jangsan East Road, Taoyuan City, Taiwan 323, R.O.C.
 Tel: +886-3-3759888

全漢企業股份有限公司
 全漢企業股份有限公司
 桃園市桃園區景興東路22號
 電話：03-3759888

Fortron/Source (Europe) GmbH
 Carl-Friedrich-Benz-Strasse 13,
 D-43177 Wülfrath, Germany
 Tel: 49-2154-894-012-0

CCC S&E

80 PLUS GOLD


ET190414

CE FC

R43001

中國製造 / 中國製造 / Made in China

Mechanical Information

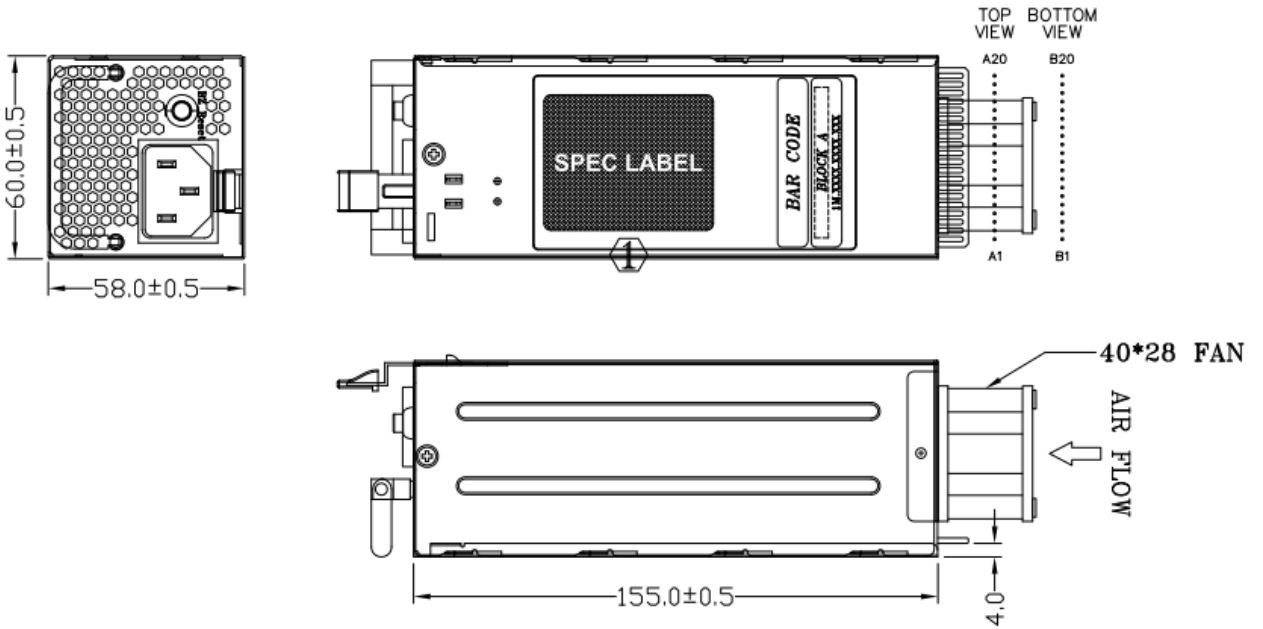

EAN / UPC Code

Model	EAN Code	UPC Code
FSP520-20RGHBB1	471322452055 6	84568500932 6

Product Information

Specification	Twins 500 Modular
Model	FSP520-20RGHBB1
TYPE	Mini ATX redundant
PFC	Active PFC > 0.9
Input Voltage	100-240Vac
Input Current	8-4A
Input Frequency	50-60Hz
Output Power Capacity	520W
12V output Current	43.3A
Efficiency	92% @ typical load
Fan Type	40x40x25mm Rifle Bearing
MTBF	200,000 Hrs
Protection	OCP/OVP/OPP/SCP
Safety	TUV/UL/CE/FCC/RCM/BSMI/CCC
Weight	g
Dimension(L X W X H)	58 X 60 X 155 mm