Hardware Overview


Pen Displays

Specifications at a glance

wacom®






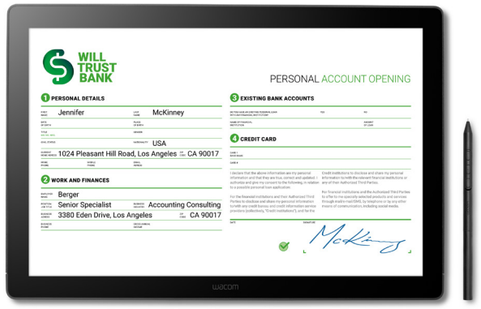












	DTU-1141B	DTH142E	DTK168E	DTK/DTH246E
General Specifications				
Dimensions (W x H x D)	283 x 210 x 11 mm 11.1 x 8.3 x 0.4 in	336 x 201 x 11 mm 13.2 x 7.9 x 0.4 in	384 x 259 x 15 mm 15.1 x 10.2 x 0.6 in	568 x 340 x 21 mm 22.4 x 13.4 x 0.8 in
Weight	800 g / 1.8 lb	780 g / 1.7 lb	2.0 kg / 4.5 lb	DTK246E: With stand: 5.7 kg / 13 lb; Without stand: 4.8 kg / 11 lb DTH246E: With stand: 5.9 kg / 13 lb; Without stand: 5 kg / 11 lb
Stand inclination	15° or flat	Flat	20° or flat	16°–69° adjustable stand
Power supply	USB bus power: 5VDC	USB Power Delivery: DC 5V 3A AC adapter: DC 9V 2.77A	USB Power Delivery: DC 5V 3A AC adapter: DC 9V 2.77A	AC adapter: DC 20V 3.25A
Pen (& Touch) Data transfer / PC side USB port shape	USB 2.0 / USB-A	USB 2.0 / USB Type-C	USB 2.0 / USB Type-C or A	USB 2.0 / USB Type-C or A
Programmable buttons	4	No	No	No
Supported operating systems	Windows 10/8.1/7 Mac OS X 10.11 or later	Windows 10 or later macOS 13 or later	Windows 10 or later macOS 13 or later Android™ 8.0 or above	Windows 10 or later macOS 13 or later Android™ 8.0 or above
LCD Screen				
LCD Panel Type	AHVA	IPS	IPS	IPS
Touch input	No	Yes	No	DTH246E: yes
Cover glass surface	Tempered anti-glare etched glass	Anti-glare and anti-fingerprint glass	Anti-glare glass	Anti-glare glass
Aspect ratio	16:9	16:9	16:9	16:9
Native resolution	1920 x 1080 pixels	1920 x 1080 pixels	2560 x 1600 pixels	2560 x 1440 pixels
Video input	USB	DisplayPort Alt Mode or HDMI	DisplayPort Alt Mode or HDMI	DisplayPort Alt Mode or HDMI
Viewing angles (horizontal/vertical)	170 deg. H/ 170 deg. V (typ)	178 deg. (89/89) H / 178 deg. (89/89) V (typ)	178 deg. (89/89) H/178 deg. (89/89) V (typ)	178 deg. (89/89) H/178 deg. (89/89) V (typ)
Colours	16.7 million colours	16.7 million colours	16.7 million colours	16.7 million colours
Luminance (brightness)	200 cd/m² (typ)	270 cd/m² (typ)	290 cd/m² (typ)	350 cd/m² (typ)
Contrast ratio	1000:1 (typ)	1000:1 (typ)	1400:1 (typ)	1000:1 (typ)
Response time	25 ms (typ)	16 ms (typ)	12 ms (typ)	12 ms (typ)
Tablet and Pen				
Technology	Electromagnetic Resonance (EMR)	Electromagnetic Resonance (EMR)	Electromagnetic Resonance (EMR)	Electromagnetic Resonance (EMR)
Active area size	10.1" diagonal (8.79 x 4.94 in / 223.2 x 125.6 mm)	14.0" diagonal (12.2 x 6.9 in / 309 x 174 mm)	16.0" diagonal (13.6 x 8.5 in / 345 x 215 mm)	23.8" diagonal (20.7 x 11.7 in / 527 x 296 mm)
Coordinate resolution	2540 lpi	2540 lpi	5080 lpi	5080 lpi
Pressure levels	1024	4096	8192	8192
Encryption	AES 256 / RSA 2048 (via driver)	AES 256 / RSA 2048 (via driver)	AES 256 / RSA 2048 (via driver)	AES 256 / RSA 2048 (via driver)
Miscellaneous				
Pen storage	Integrated pen compartment, pen stand	Fabric holder	Pen stand	Pen stand
Security lock slot	Kensington® MicroSaver	Kensington® lock NanoSaver	Kensington® Security Slot	Kensington® Security Slot
Mounting system	VESA 75 x 75 mm	No	VESA 75 x 75 mm	VESA 75 x 75 mm
Signature software compatibility	Compatible with signature / eSign software and Wacom sign pro PDF; C++, .NET and Java SDK/API available for developers	Compatible with signature / eSign software and Wacom sign pro PDF; C++, .NET and Java SDK/API available for developers	Compatible with signature / eSign software and Wacom sign pro PDF; C++, .NET and Java SDK/API available for developers	Compatible with signature / eSign software and Wacom sign pro PDF; C++, .NET and Java SDK/API available for developers
Drivers	Wacom driver and DisplayLink video driver required, SDK/API available for developers	Wacom Driver required for full functionality	Wacom Driver required for full functionality	Wacom Driver required for full functionality
Package contents	DTU-1141B, Pen, USB cable, Quick Start Guide, Pen tether, 5 x extra pen nibs, Nib removal tool, 4 VESA mounting screws, USB plug attachment, IPI	DTH142E, Wacom One Standard Pen, Replacement nibs (3 x POM), Nib removal tool, Pen tether, USB Type-C to C cable, USB Type-C to A cable, HDMI to mini HDMI cable, AC adapter with plug (US/TW/JP type, EU/SW/CL type, UK type), Quick Start Guide, IPI	DTK168E, Wacom Pro Pen 3E, Vari-angle Stand (incl. 1 x Carbon Shaft POM Nib, 1 x Felt Nib), replacement nibs (5 x Carbon Shaft POM Nibs) , Nib removal tool, Pen tether, Pen Switch Cover, USB Type-C to C cable for DisplayPort Alt Mode, USB Type-C to C cable for Power, USB Type-C to A cable, HDMI to mini HDMI cable, AC Power Adapter, AC plug head, Quick Start Guide, IPI	DTH246E or DTK246E, Wacom Pro Pen 3E, Vari-angle Pen Stand (incl. 1 x Carbon Shaft POM Nib, 1 x Felt Nib), replacement nibs (5 x Carbon Shaft POM Nibs), Nib removal tool, Pen tether, Pen Switch Cover, USB Type-C to C cable, USB Type-C to A cable, HDMI to mini HDMI cable, Power Cable, AC Power Adapter, Quick Start Guide, IPI

More human



More digital



Japan (HQ)
For more information please contact:
Wacom Co., Ltd.
· Sumitomo Fudosan Shinjuku Grand Tower 31F, 35F, 8-17-1 Nishi-Shinjuku, Shinjuku-ku, Tokyo 160-6131, Japan
vm-info@wacom.co.jp



Americas
For more information please contact / Pour de plus amples informations,
veuillez contacte / Para obtener información adicional,
póngase en contacto con: Wacom Technology Corporation
· 12121 NE 99th Street Suite 2140, Vancouver, WA 98682
esign@wacom.com · 1-503-525-3100



Europe, Middle East and Africa
For more information please contact / Pour de plus amples informations, veuillez contacte / Para obtener información adicional, póngase en contacto con: Wacom Europe GmbH
· Speditionstraße 2, 40221 Düsseldorf, Germany
solutions@wacom.eu · +49 211 385 48 0



China
For more information please contact:
Wacom China Corporation
· 518, West Wing Office, China World Trade Center, No. 1 Jianguomenwai Avenue, Chaoyang District, Beijing 100004, China
WW@wacom.com · 400-810-5460

Hong Kong
For more information please contact:
Wacom Hong Kong Ltd.
· Office 107G, 17/F, Tower I, Grand Century Place, 193 Prince Edward Road West, Mong Kok, Hong Kong, China
e-signature@wacom.com · +852 2573 9322



Australia
For more information please contact:
Wacom Australia Pty. Ltd.
· Level 5, 7 Eden Park Drive, Macquarie Park NSW 2113
Contactapbs@Wacom.com · +61-2-9422-6700

Korea
For more information please contact:
Wacom Korea Co., Ltd.
· Rm #1211, 12F, KGIT Sangam Center, 402 Worldcup Bukro, Mapo-gu, Seoul 03925, Korea
Contactapbs@Wacom.com · 080-800-1231

Singapore
For more information please contact:
Wacom Singapore Pte. Ltd.
· 20 Collyer Quay Level 12, #12-07, Singapore, 049319
Contactapbs@Wacom.com · +65-6258-8640

India
For more information please contact:
Wacom India Pvt. Ltd.
· JA0811 & JA0812, 8th Floor, DLF Tower A, Jasola Distinct Center, New Delhi 110025 India,
Contactapbs@Wacom.com
Customer Support: 000-800-100-4159, +91-11-47239412

wacom.com/for-business

© 2026 Wacom Co., Ltd.