

ZYXEL



NWA1123-AC HD

802.11ac Wave 2 Standalone Access Point

The Zyxel NWA1123-AC HD is a Wave 2 dual-radio 3x3 MU-MIMO Standalone Access Point with a combined data rate of up to 1.6Gbps. Thanks to its superior hardware design with next generation beamforming technology and advanced noise suppression, the NWA1123-AC HD delivers increased coverage and improved connection speeds for every client. The high-performance NWA1123-AC HD provides fast, reliable wireless experience that makes itself a favorable, cost-effective solution for high-density WiFi deployments.

Benefits

Second Generation MU-MIMO – the true breakthrough in wireless connectivity

Stepping up from 802.11ac, the Wave 2 technology introduces Multi-User MIMO (MU-MIMO). This is an important WiFi development that enables an AP to communicate with multiple clients at a time offering up to 300% performance for a 3x3 AP. The benefits of Wave 2 technology are clear, but there are still two well-known technical challenges: the airtime cost when performing channel measurement, and the data rate being limited by the slowest client in the MU group.

To overcome those challenges, the NWA1123-AC HD uses second generation transmit beamforming technology incorporating Low End Sensitivity Improvements and Time Domain Channel Smoothing allowing data rates to increase for not only MU-MIMO clients, but for all existing ones as well. Additionally, the NWA1123-AC HD is built with a high-efficiency antenna module, premium power amplifiers and low-noise elements delivering superior wireless performance over other Wave 2 access points on the market.



Excellent wireless coverage and performance with the latest 3x3 Wave 2 802.11ac technology



Next generation beamforming technology delivers maximum coverage



Innovative MU-MIMO technology increases downstream throughput by simultaneously talking to multiple devices at the same time



Simple installation with Zyxel Utility makes installation and setup a breeze whether for just single or multiple units at once



Solid state capacitors and advanced heat dissipation ensure high reliability and long life—even in the toughest environments



Advanced Cellular Coexistence minimizes interference from 3G/4G cellular networks



Unbeatable coverage

Maximizing wireless coverage is more than just a game of output power. Every hardware design details including the layout, the antenna and the ability to distinguish between numerous sources of noise all contribute in determining coverage and throughput. Unlike most products on the market that measure only conducted sensitivity without considering the effect of antennas, Zyxel examines sensitivity with antenna (a.k.a. OTA sensitivity) as a whole wireless system to minimize the degradation in sensitivity at receiver end. In short, Zyxel has optimized the design of the NWA1123-AC HD to boost sensitivity and maximize real world performance.

3G/4G Cellular Network Coexistence

With gradually pervasive 3G infrastructure deployment at customer sites, users start to experience wireless performance degrade e.g. ping drops and high latency, however whenever users shutdown the 3G equipment, wireless service resumes working smooth. To enable 3G/4G cellular network coexistence and minimize interference from 3G/4G antennas or signal boosters, the NWA1123-AC HD has built-in 3G/4G interference filters. As a result, installation of the AP no longer needs to worry about the visible or invisible 3G/4G indoor antennas around.


Zyxel One Network experience

Aimed at minimizing the repetitive task of deploying and managing networks, Zyxel One Network (ZON) simplifies configuration, management and troubleshooting of multiple AP and switch deployments. This enables users to focus on their other key business priorities. The Zyxel One Network incorporates Zyxel One Network Utility (ZON Utility), an easy-to-use tool designed for instant network setup and Zyxel Smart Connect, which allows Zyxel networking equipment to find and recognize each other automatically. Zyxel One Network further facilitates remote network maintenance with one-click functions, and works across multiple networking products from Switch to Wireless to Gateway.


Optimized wireless experience with advanced features

The NWA1123-AC HD ensures an optimized wireless experience for users with a range of wireless features such as Dynamic Channel Selection (DCS), Load Balancing and Smart Client Steering. DCS minimizes the interference of co-channel and overlapping channels. Load Balancing enables administrators to set limits on the number of clients associated with each AP. Furthermore, Smart Client Steering features with Band Select, Signal Threshold and Band Balancing combine to deliver stable, reliable wireless connections. Band Select and Signal Threshold monitor the capabilities of each wireless client and steer them to the less-congested band and AP with better signals. Band Balancing detects dual-radio clients and distributes clients across 2.4 GHz and 5 GHz bands on AP. All of these deliver a smooth, consistent and uninterrupted wireless experience to its users.

Powerful Hardware Design

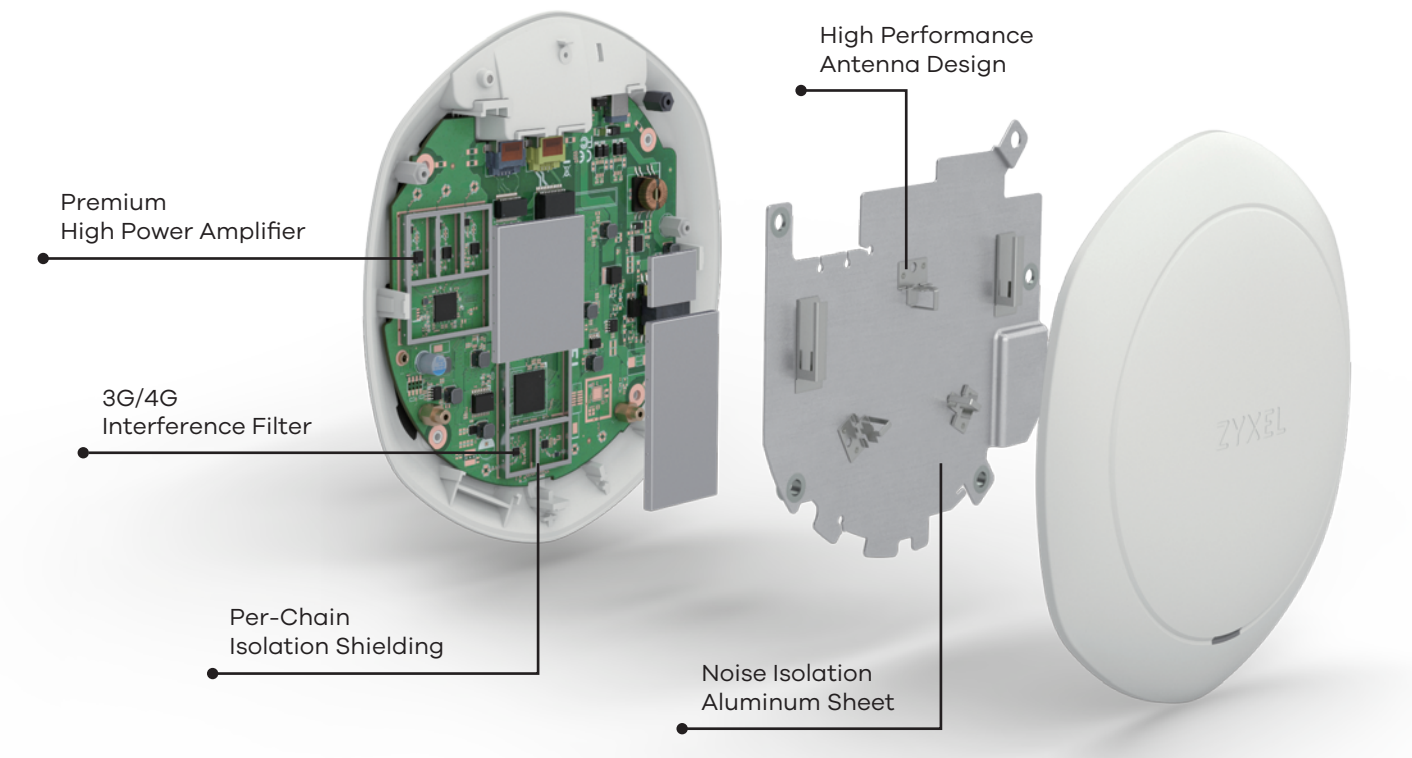


Application Diagram

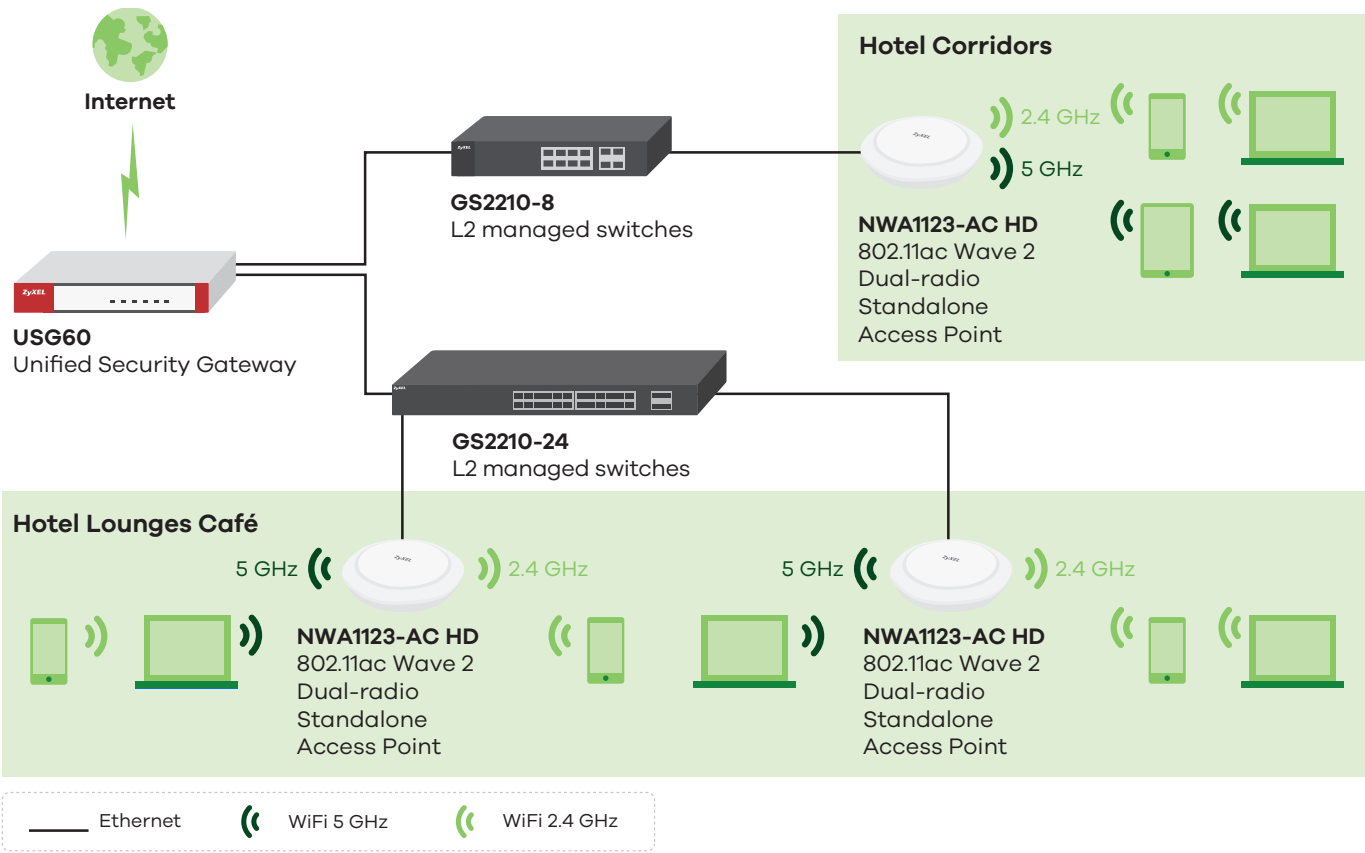

*NWA1123-AC HD will support repeater mode in further features enhancement.

Specifications

Model		NWA1123-AC HD
Product name		802.11ac Wave 2 Standalone Access Point
		
Main Design		
Wireless frequency		2.4 GHz & 5 GHz
Radio		2
RF Specifications		
Frequency band		<div>2.4 GHz (IEEE 802.11 b/g/n)</div> <ul style="list-style-type: none"> • USA (FCC): 2.412 to 2.462 GHz • Europe (ETSI): 2.412 to 2.472 GHz • Taiwan (TW): 2.412 to 2.462 GHz <div>5 GHz (IEEE 802.11 a/n/ac)</div> <ul style="list-style-type: none"> • USA (FCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz • European (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz • Taiwan (TW): 5.15 to 5.25 GHz; 5.25 to 5.35 GHz; 5.47 to 5.725 GHz; 5.725 to 5.850 GHz
802.11n/ac premium features		<ul style="list-style-type: none"> • 802.11n: 2x2 MIMO with two spatial stream (SU-MIMO) • 802.11ac: 3x3 MIMO with three spatial stream (SU-, or MU-MIMO) • 802.11ac beamforming (transmit beamforming) • Maximal ratio combining (MRC) • Low End Sensitivity Improvements (LESI) • Time Domain Channel Smoothing • 20-, 40- and 80-MHz channels • PHY data rates total up to 300 Mbps (11n) + 1300 Mbps (11ac) • Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx) • Cyclic Delay diversity (CSD) support • Maximum Likelihood Demodulation (MLD) support • Low Density Parity Check (LDPC) support
Typical transmit output power (dBm)¹	US (FCC) 2.4 GHz	25 dBm
	US (FCC) 5 GHz	28 dBm
	EU (ETSI) 2.4 GHz	20 dBm
	EU (ETSI) 5 GHz	26 dBm
Number of antenna	2.4 GHz	2x2 MIMO
	5 GHz	3x3 MIMO
Antenna gain	2.4 GHz	3 dBi
	5 GHz	3 dBi
Support data rate		<ul style="list-style-type: none"> • 802.11a/g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps • 802.11n: up to 300 Mbps in MCS15 (40MHz; 2 Spatial Streams; GI=400ns) • 802.11ac: up to 1300 Mbps in MCS9 (80MHz; 3 Spatial Streams; GI=400ns)
Conducted sensitivity		Min. Rx sensitivity up to -103 dBm
Over-the-Air (OTA) sensitivity²		Min. Rx sensitivity up to -103 dBm
Interfaces		
Number of 10/100/1000M LAN		2 x switch ports
Console port		4-Pin serial
Input power requirements		Direct DC power or Power over Ethernet (PoE) ³
PoE		802.3at (Full mode) 802.3af (Restrict 2.4G & 5G radio to one transmit stream only.)
PoE power draw		15.5 W (802.3at PoE)

Model	NWA1123-AC HD		
Wireless Security			
WEP	Yes		
WPA/WPA2-PSK	Yes		
WPA/WPA2-Enterprise	Yes		
WLAN access control list	Yes		
EAP type	EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-FAST, EAP-AKA and EAP-SIM		
IEEE 802.1X	Yes		
Number of SSID	16		
MAC filtering	Yes		
Layer-2 Isolation	Yes		
RADIUS authentication	Yes		
Rogue AP detection	Yes		
Network			
IPv6 host	Yes		
VLANs	Yes		
DHCP client	Yes		
QoS and Power Save			
WMM	Yes		
WMM power save	Yes		
U-APSD	Yes		
DiffServ marking	Yes		
Management			
ZON Utility*4	<ul style="list-style-type: none">• Discovery of Zyxel switches, APs and gateways• Centralized and batch configurations<ul style="list-style-type: none">• IP configuration• IP renew• Device reboot• Device locating• Firmware upgrade• Password configuration• Device factory reset• Web GUI access• One-click quick association with Zyxel AP Configurator (ZAC)		
Smart Connect	<ul style="list-style-type: none">• Neighbor device discovery• One-click remote management access to the neighboring Zyxel devices		
Zyxel AP Configurator*5	<ul style="list-style-type: none">• Batch AP configuration• Batch AP firmware upgrade• Batch AP profile backup		
Zyxel Wireless Optimizer*6	<ul style="list-style-type: none">• Wi-Fi AP planning• Wi-Fi coverage detection• Wireless health management		
Standalone AP mode	Yes		
Repeater AP mode	Future Support		
CLI	Yes		
SNMP	v2c/v3		
Others			
Plenum rating	Yes		
Kensington lock support	Yes		
Power supply	Input: AC 100-240V, 50~60Hz Output: DC +12V 2A		
MTBF (hr)	1,306,790		

Model		NWA1123-AC HD
Standard Compliance		
Ethernet		<ul style="list-style-type: none"> • IEEE 802.3 • IEEE 802.3u • IEEE 802.11ab • IEEE 802.3au • IEEE 802.3az • IEEE 802.3af/at
PoE		IEEE 802.3af/at
WLAN		<ul style="list-style-type: none"> • 802.11b: DBPSK, DQPSK, CCK • 802.11g: BPSK, QPSK, 16-QAM, 64-QAM • 802.11a: BPSK, QPSK, 16-QAM, 64-QAM • 802.11n: BPSK, QPSK, 16-QAM, 64-QAM • 802.11ac: BPSK, QPSK, 64-QAM, 256-QAM
Certifications		
Radio		FCC part 15C, FCC part 15E, ETSI EN 300 328, EN 301 893, LP0002, EN 60601-1-2
EMC		FCC Part 15B, EN 301 489-1, EN 301 489-17, EN55032, EN55024, EN61000-3-2/-3, BSMI CNS13438
Safety		EN 60950-1, IEC 60950-1 BSMI CNS14336-1
Physical Specifications		
Item	Dimensions (WxDxH)(mm/in.)	211 x 223 x 39/8.31 x 8.78 x 1.54
	Weight (g/lb.)	750/1.65
Packing	Dimensions (WxDxH)(mm/in.)	266 x 268 x 56/10.47 x 10.55 x 2.21
	Weight (g/lb.)	1090/2.40
Included accessories		<ul style="list-style-type: none"> • Wall/ceiling mount plate • 12V 2A adapter • Mounting screws
Environmental Specifications		
Operating	Temperature	-20°C to 50°C/-4°F to 122°F
	Humidity	10% to 90% (non-condensing)
Storage	Temperature	-40°C to 70°C/-40°F to 158°F
	Humidity	10% to 90%

*1 Maximum output power is limited by regional regulatory.

*2 OTA sensitivity is measured through the antenna represents real sensitivity in field application.

*3 When both power sources are available, DC power takes priority over PoE.

*4 Support from ZON Utility V2.1 or above.

*5 Support from ZAC V1.1.3 or above.

*6 Support from ZWO V1.0.5 or above.

For more product information, visit us on the web at www.zyxel.com

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

Datasheet **NWA1123-AC HD**



5-100-00717019 09/17