




Dell 24 Touch Monitor P2418HT

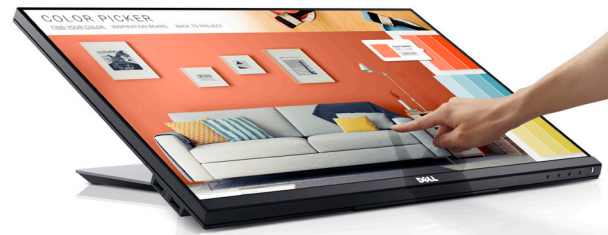

Help boost your productivity with Dell's first 23.8-inch touch monitor
Unique articulating stand, anti-glare screen make for an effortless touch experience

The ultimate touch experience for business

Engage with your content easily and comfortably.

- Anti-glare touch panel reduces distracting reflection and fingerprints, improving viewing clarity.
- Unique articulating stand with extended tilt, plus height-adjustment and swivel capabilities lets you position the screen in the ideal position for touch navigation.
- Intuitive 10-point touch, compatible with Windows® 10, provides smoother navigation across the anti-glare surface.

Collaborate and enjoy the view

Outstanding usability and a comfortable viewing experience.

- Optimise eye comfort with the TUV-Certified flicker-free screen with Comfortview which minimises blue light emissions.**
- Reduce desk clutter with a cable management system and integrated power supply.
- Enjoy excellent image quality thanks to Full HD resolution and a 8 million:1 dynamic contrast ratio.
- Experience clear fluid motion from fast 6ms (gray-to-gray) response time and consistent colours across a wide 178°/ 178° viewing angle.

Help maximise your productivity


High productivity is yours with features that help improve efficiency.

- Experience a more seamless view and workflow across multiple monitors with the P2418HT's ultrathin bezels.
- Get more done with Dell Display Manager — Easy Arrange helps you tile desktop applications to aid multitasking while Auto Mode lets you use custom preset colour settings to save time.
- Work the way you like with flexible mounting options and extensive, convenient connectivity ports.

Experience superb reliability

Comes with Dell's high reliability promise.

- Enjoy peace of mind with Dell's Premium Panel Guarantee¹.
- Minimise downtime with 3 years Advanced Exchange Service².
- Enjoy high reliability from the #1 monitor brand worldwide for three consecutive years*.

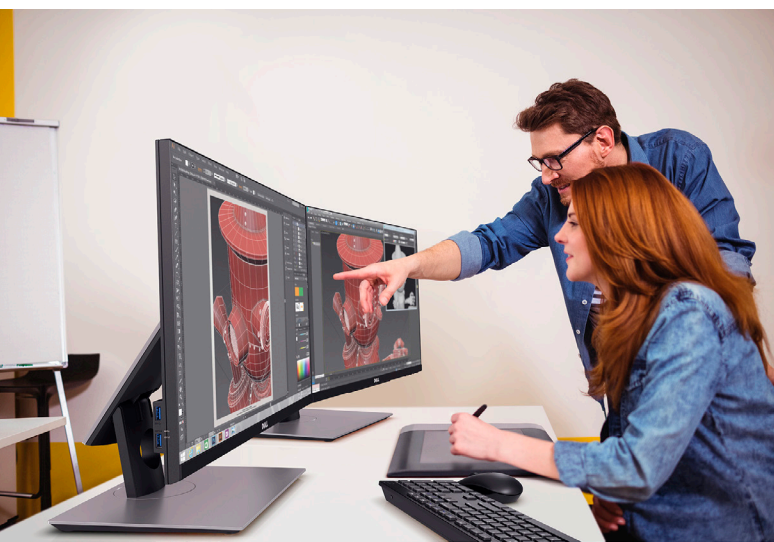

Thank you
for making
Dell Monitors

#1
worldwide*

For more information visit
www.dell.com/monitors

Dell 24 Touch Monitor | P2418HT

Articulating stand lets you position the screen in the ideal position for touch navigation.




Extended tilt and height adjustable
(-5°– 60°)




Swivel

Connectivity

Image enlarged and cropped to show detail

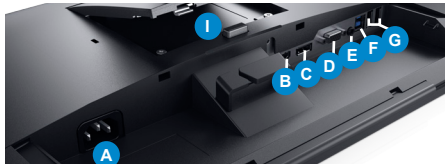

- | | |
|-------------------------|-----------------------------|
| A AC power | F USB 3.0 upstream |
| B HDMI | G USB 2.0 downstream |
| C DisplayPort | H USB 3.0 downstream |
| D VGA | I Stand lock |
| E Audio line-out | |



What's in the box?

Components

- Monitor panel with stand
- Cable cover
- Cable sleeve

Cables

- DisplayPort cable
- Power cable
- VGA cable
- USB 3.0 upstream cable (enables the USB port on the monitor)

Documentation

- Quick Setup Guide
- Drivers and documentation media (CD)
- Safety and regulatory information

Standard service plan

- 3 Years Advanced Exchange Service² & 3 Years Limited Hardware Warranty³
- Premium Panel Guarantee¹

Environmental compliance

ENERGY STAR[®], EPEAT[®] Gold⁴, RoHS, TCO Certified Displays

Display

| | |
|-----------------------------------------------|---------------------------------------------------------------|
| Model number | P2418HT |
| Viewable image size (diagonal) | 60.47 cm (23.8 inches) |
| Active display area | |
| Horizontal | 527.04 mm (20.75 inches) |
| Vertical | 296.46 mm (11.67 inches) |
| Maximum resolution | 1920 x 1080 at 60 Hz |
| Aspect ratio | 16:9 |
| Pixel pitch | 0.275 mm x 0.275 mm |
| Brightness (typical) | 250 cd/m ² |
| Colour gamut (typical) | 84% (CIE 1976) ⁵ |
| Colour depth | 16.7 million colours |
| Contrast ratio (typical) | 1,000:1 |
| Dynamic contrast ratio | 8 million:1 |
| Viewing angle (typical) (vertical/horizontal) | 178°/178° |
| Response time (typical) | 6 ms gray-to-gray |
| Panel technology | In-plane switching, anti-glare with 3H hardness |
| Backlight | LED |
| Speaker (optional) | Recommended desktop speaker — Dell 2.0 Speaker System (AE215) |

Connectivity

| | |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connectors | 1 x DisplayPort (ver 1.2) ⁶ , 1 x HDMI (ver 1.4), 1 x VGA, 1 x USB 3.0 port upstream, 2 x USB 3.0 ports (side) (including 1 x USB 3.0 BC1.2 charging port), 2 x USB 2.0 ports (bottom), 1 x Analog 2.0 audio line out (3.5 mm jack) |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Design and touch features

| | |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Touch features | Type: projected capacitive system; Input: bare finger; Points: 10 touch points; Response time: 35 ms; Resolution: 4096 x 4096; Operating systems supported: Windows 10, 8.1, 7 |
| Articulating stand | Height adjustable (90 mm), Tilt (-5° to 60°), Swivel (-30° to 30°) |
| VESA mounting support (wall mount kit sold separately) | 100 mm x 100 mm |
| Security | Security lock slot (security lock not included); Anti-theft stand lock slot (to panel) |

Power

| | |
|-----------------------------------------------|---------------------------------------------------|
| AC input voltage/frequency/current | 100 to 240 VAC/50 or 60 Hz ± 3 Hz/1.5 A (typical) |
| Power consumption (typical) | 18W |
| Power consumption (ENERGY STAR [®]) | 16W |
| Power consumption standby/sleep mode | <0.3 W |

Dimensions (with stand)

| | |
|-------------------------------------------|---------------------------------------------------|
| Height with stand (Compressed ~ Extended) | 323.2 mm ~ 419.6 mm (12.72 inches ~ 16.52 inches) |
| Width | 537.8 mm (21.17 inches) |
| Depth | 234.8 mm (9.24 inches) |

Weight

| | |
|--------------------------------|--------------------|
| Weight (panel only – no stand) | 3.12 kg (6.88 lb) |
| Weight (with stand) | 7.42 kg (16.35 lb) |
| Shipping weight | 9.50 kg (20.94 lb) |

^{*} Dell monitors are #1 Worldwide for 3 consecutive years. Source: IHS Global Inc. Desktop Monitor Market Tracker (2013 to 2015) ID#G16000073
^{**} Certified (ID0000051369 – Flicker Free / ID0000051370 - Low Blue Light Content).

¹ Registered in US and Canada only.

¹ In the event you discover even one bright pixel during the Limited Hardware Warranty period, a free panel exchange is guaranteed. (see pixel panel info located on Dell.com web page for complete details): <http://support.dell.com/support/topics/global.aspx/support/kcs/document?docid=414288>

² Advanced Exchange Service: Replacement part/unit dispatched, if needed, following completion of phone/online diagnosis.

³ Fee charged for failure to return defective unit. Availability varies. Other conditions apply.

³ For a copy of the Limited Hardware Warranty, write Dell Products, Dell House, The Boulevard, Cain Road, Bracknell, Berkshire, RG12 1LF, UK or see dell.com/warranty.

⁴ EPEAT Gold registered in the U.S. EPEAT registration varies by country. See www.epeat.net for registration status by country.

⁵ Colour gamut (typical) is based on CIE1976 (84%) and CIE1931 (72%) test standards.

⁶ DisplayPort 1.2 - Supports High Bit Rate 2 (HBR2) and Multi-stream transport (MST). P2418HT does not support fast AUX transaction, 3D stereo transport and HBR (High bit rate) audio.

Based on ID#16000209 dell.co.uk/monitors

Product availability varies by country. Please contact your Dell representative for more information.

