

EPSON®

TM-U675

Receipt / Slip Printer

ESC/POS®



Conforms to OLE POS specifications.

Superb check handling and MICR features, low printing noise, and a compact and smart design make this POS printer ideal for applications in banks, post offices, boutiques, and other upscale retail environments.



Receipts



Journals



Sales slips



CARD

Credits



Debits



CHECK

Checks



CE

Check endorsement



DR

Daily reports



MICR

MICR DEVICE
(Factory option)



The TM-U675 was created in answer to the increased demand for efficiency at the service counter. While maintaining the speed, reliability of the TM-U375, the bank and retail markets' most popular station printer, the TM-U675 also brings easy check handling and outstanding MICR performance. This compact, multifunction printer is the perfect solution for applications in financial institutions, post offices, and a variety of retail stores.

Fast Check Printing & MICR

At 8.5 sec for front side printing and 11.0 sec for front side printing plus MICR, the TM-U675 is one of the fastest slip printing solution in its class. The speed and easy slip paper insertion mean retailers can efficiently serve more customers in a shorter amount of time.

Easy Roll-Paper Handling

A movable platen makes it easy to set and release roll paper. Operator errors are reduced and roll-paper handling time is slashed.

High Reliability

With an MCBF of 37 million lines for receipt and slip, this printer boasts high reliability and high ROI.

High-speed Personal Check Printing

The answer is the TM-U675. Its logical seeking makes check printing a breeze. It also does duty for high-speed receipt, check endorsement and sales printing.

Low Noise

The quiet operation of the TM-U675 makes it the ideal choice for boutiques, fine restaurants, jewelry stores, and other upscale shops.

Four Models From Which To Choose

The TM-U675 is available in four customer-pleasing models: standard model; with a MICR reader; an autocutter, and MICR reader and an autocutter.

ESC/POS®

EPSON led the way worldwide with the introduction of ESC/POS, a POS printer command system enabling versatile POS system construction with high scalability. Compatible with all types of printers and displays, this proprietary control system also offers the flexibility for easy future upgrades. It has become the international standard for POS printers.


OLE POS

Taking the lead worldwide, EPSON offers OCX driver software for application development support in Windows®95/NT environments.


ESC/POS is a registered trademark of SEIKO EPSON CORPORATION.
EPSON is a member of the OPOS committee.

APPEARANCE


Units: mm

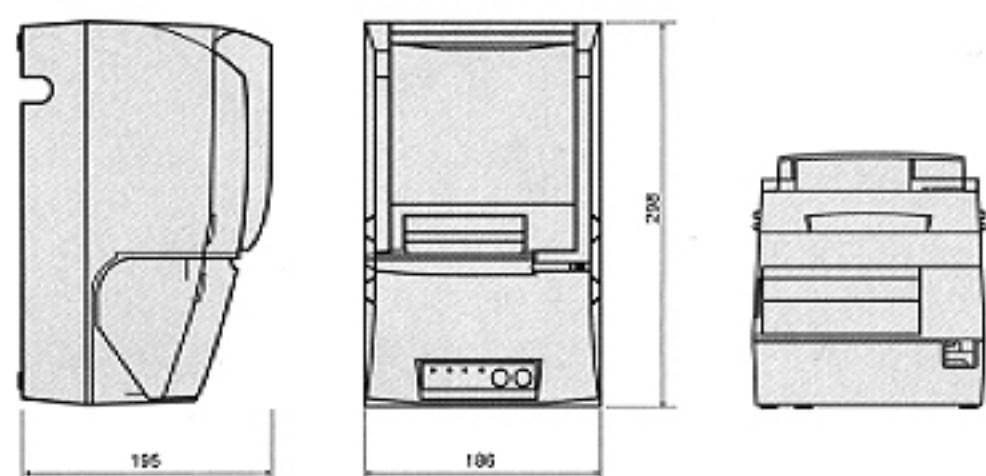

CONNECTOR PANEL SERIAL I/F

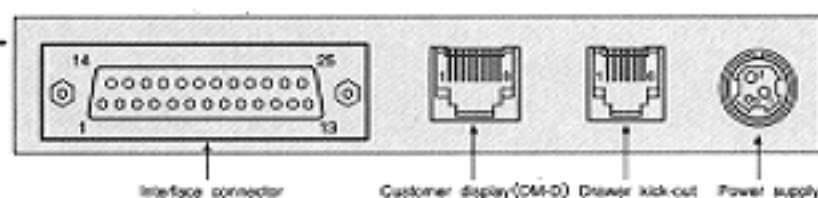

PARALLEL I/F

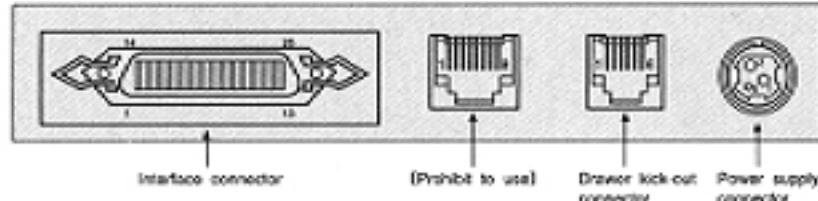

ACCESSORY

RIBBON CASSETTE



ERC-32 (purple)

OPTIONS

POWER SUPPLY



PS-170

INPUT : 100-240 VAC
OUTPUT : 24 VDC, 2.0 A
Plug : 3P Power jack
Safety standards : UL, C-UL, TÜV

CUSTOMER DISPLAY



DM-D SERIES



Windows is a registered trademark of Microsoft Corporation

SPECIFICATIONS

Print Method	9-pin, serial impact dot matrix
Print Font	5 × 9 / 7 × 9
Column capacity	Receipt : 37 / 50 columns, Slip / Validation : 45 / 60 columns
Character size	1.56 (W) × 3.1 (H) mm / 1.24 (W) × 3.1 (H) mm
Character set	95 Alphanumeric, 37 International, 128 × 9 Graphic characters
Print Speed	Approx. 4.6 LPS (40 columns, 17.8 CPI)
Data Buffer	45 or 4K bytes
Interface	RS-232C / Bi-directional parallel / RS-485 / USB / Others*
Paper Dimensions	Receipt or Journal: 82.5 ± 0.5 mm × dia. 83 mm Slip: 70 (W) × 150 (L) to 148 (W) × 210 (L) mm Validation: 148 (W) × 70 (L) to 150 (W) × 210 (L) mm
Paper Thickness	Receipt or Journal: 0.06 to 0.085 mm / sheet (Total thickness: 0.2 mm or less) Slip: 0.09 to 0.2 mm / sheet (Total thickness: 0.09 mm to 0.31 mm)
Copy Capability	One original and two copies
Inked Ribbon	ERC-32 (Purple)
Ribbon Life	6 × 10 ⁶ characters
Power Supply Voltage	24 VDC ± 10 %
Current Consumption	Approx. 1.7 A (mean)
D. K. D. Function	2 drivers
Reliability	MTBF : 18 × 10 ⁴ hours MCBF : 37 × 10 ⁵ lines
Overall Dimensions	186 (W) × 298 (D) × 195 (H) mm
Weight	Approx. 5.8 kg
Factory options	MICR device
EMI Standards	VCCI class A, FCC class A, CE marking
Safety Standards	UL, C-UL, TÜV

*Please contact your EPSON representative.

Specifications are subject to change without notice.

SEIKO EPSON CORPORATION Web site <http://www.epson.com>

For details, please contact:

99.1.30A Printed in Japan