

air Fiber®

Carrier Class Point-to-Point Gigabit Radio

Model: AF24, AF5, AF5U

High Performance Wireless Backhaul

Extreme, Long-Range Links

Worldwide License-Free Operation





Revolutionary Wireless Technology

Introducing airFiber®, a truly revolutionary Point-to-Point wireless platform from Ubiquiti Networks™. Housed in a compact, highly efficient form factor, airFiber delivers amazing wireless gigabit+ performance, low latency, and long range. airFiber ushers in a new era in price-disruptive wireless technology ideal for carrier backhaul, building-to-building enterprise use, or public safety applications.

Efficient by Design

Every detail of airFiber was designed and engineered by the Ubiquiti R&D Team. From the silicon chip up to the innovative split-antenna architecture, the Ubiquiti R&D Team created airFiber to deliver superior throughput with efficiency. airFiber was purpose-built to create a high performance backhaul.

Plug and Play Deployment

Based on Ubiquiti's innovative and intuitive airOS®, the airFiber Configuration Interface enables quick deployment. With installation efficiency in mind, the mechanical design allows easy installation by one person. A two-person installation crew can effectively install and align an airFiber link.

To fine-tune the alignment, the received signal levels can be conveniently accessed via any of these methods:

- airFiber LED display
- · airFiber Configuration Interface
- audio tone feature

Designed for Freedom


airFiber operates in worldwide, **license-free** 24 GHz frequencies, as well as 5 GHz frequencies. Anyone around the world can purchase and operate airFiber without any special permits, paperwork, or added licensing costs. Users are free to locate, deploy, and operate airFiber practically anywhere they choose (subject to local country regulations).

Model	Description	Operating Frequency*
AF5	Supports mid-band 5 GHz frequencies	5470 - 5950 MHz
AF5U	AF5U Supports high-band 5 GHz frequencies 5725 - 6200	
AF24	Supports 24 GHz frequencies	24.05 – 24.25 GHz

* Refer to the Specifications section for more information.

Built for Speed and Range

airFiber delivers gigabit performance at 1.0+ Gbps for airFiber AF5/AF5U and 1.4+ Gbps for airFiber AF24. To put this in perspective, airFiber can transmit a 100 MB file in less than a second. Rivaling common broadband providers, airFiber download speed is up to 100x faster. With speed and throughput surpassing conventional wired backhauls, airFiber prevails over expensive and labor-intensive wired infrastructures.

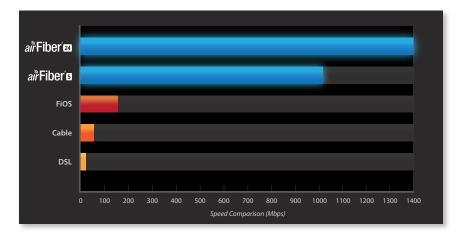

airFiber is built for long-range use: up to 13+ km for airFiber AF24 and up to 100+ km for airFiber AF5/AF5U, which launches the innovative xtreme Range Technology (xRT™) feature.



airFiber backhauls do not share the security risks associated with wired backhauls. The long distances of wired backhauls are vulnerable to copper theft, fiber optic damage, vandalism, and accidental breakage. With airFiber, only the installation points of the airFiber links need to be secured.


Innovative Proprietary Modem Technology

Ubiquiti's innovative proprietary modem technology was purpose-built to address the specific challenges of outdoor, PtP (Point-to-Point) bridging and high-performance network backhauls. Every aspect of the radio has been carefully simulated and designed to optimize range, speed, and latency performance in the harshest RF noise environments.

Synchronous Data Transmission and Reception

Conventional wireless standards impose a latency by having to receive a packet before a packet is transmitted. airFiber can transmit data synchronously without any wait time. airFiber features traditional TDD and FDD modes of operation in addition to the proprietary Hybrid Division Duplexing (HDD) mode, which provides a breakthrough in range and spectral efficiency performance.

Based on the ranging algorithm built into the air protocol, the airFiber radios use patent-pending HDD technology to calculate the propagation delay and know when each radio can transmit and receive, so they send packets in precise synchronization. Packet transmission latency is virtually eliminated.

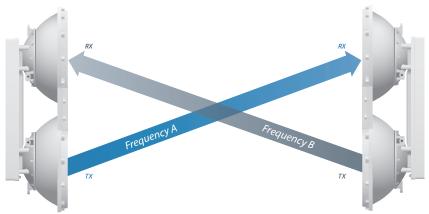

airFiber AF5/AF5U Radios in Full-Duplex Mode

Innovative Dual-Antenna Architecture

airFiber features a dual-independent, 2x2 MIMO, high-gain reflector antenna system. Separate transmit (TX) and receive (RX) antennas help extend link budgets by eliminating the extra RF losses caused by the switches or duplexers required in systems with common TX/RX antennas.

Each airFiber radio has two complete antenna systems and a mechanical back-plane that are constructed as a one-piece "monocoque" molding – a radical departure from industry practice. "Monocoque" means that the exterior skin supports the structural load of airFiber hardware. Due to its single-piece, injection-molded architecture, airFiber adds lightness in weight and affordability to its list of advantages.

Network Management

airFiber supports a variety of features to help you manage your network:

- Network management options A choice between the greater security of out-of-band management and the convenient of in-band management.
- SNMP support Full SNMP support to aid in network management.
- Local and remote airFiber status information Available on the Main tab of the airFiber Configuration Interface.




airFiber AF5/AF5U



airFiber AF24 shown without radome

airFiber on airFib

Two airFiber models are available for 5 GHz. The model, AF5, features the popular mid-band frequencies, which are freely used in many parts of the world. The high-band model, AF5U, which can operate in the 5.7 - 6.2 GHz bands, has robust filtering to enable co-location with devices operating in the lower 5 GHz bands while allowing operation at a higher output power in many areas of the world.

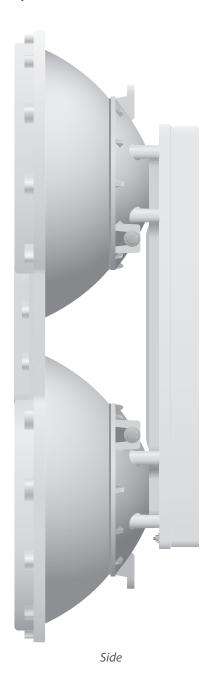




Back

1.0+ Gbps

Real Data Throughput







Superior Processing

Ubiquiti Networks introduces our proprietary INVICTUS™ core communications processing engine. The speed, power, and efficiency of this integrated circuit enhances the performance of airFiber AF5/AF5U.

Efficient Use of 5 GHz Band

airFiber AF5/AF5U features 1 MHz center channel resolution with market-leading Power Envelope Tracking technology. airFiber AF5/AF5U accurately and continuously controls transmit power relative to the band edge. The power level automatically tracks to optimize performance near band edges, allowing you to choose the part of the band with the least interference.

Long-Range Links

Newly developed for airFiber AF5/AF5U, the patent-pending xRT feature uses an innovative, adaptive multi-channel coding scheme to enhance radio transceiver performance, thereby maximizing your link budget and spectrum utilization – while still maintaining regulatory compliance. This results in links that can span distances from 10 m up to 100+ km.

Quick and Easy Installation


The unique sliding-clamp design of airFiber AF5/AF5U allows mounting hardware to be pre-assembled prior to installation – no more dropped screws at the top of the tower. As an added convenience, the drop-in cradle mount design allows the installer to attach mounting hardware to the pole without having to support the weight of the airFiber radio during installation.

Radio Alignment Display

Introduced on airFiber AF5/AF5U, the Radio Alignment Display (RAD) makes aiming quicker and easier. The dual, calibrated signal strength indicators display the actual signal strength on the local and remote airFiber radios in real time. The comprehensive array of radio status indicators display the following:


- GPS synchronization status
- Master/slave mode
- RF link status
- RF overload warning
- Current modulation mode
- Link activity and speed for wired management and data ports



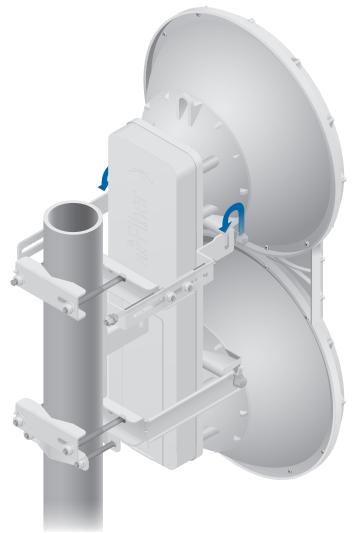

ar Fiber 24

airFiber AF24 provides a breakthrough in 24 GHz backhaul performance. It delivers superior speed with spectral efficiency in the worldwide, license-free 24 GHz radio band.

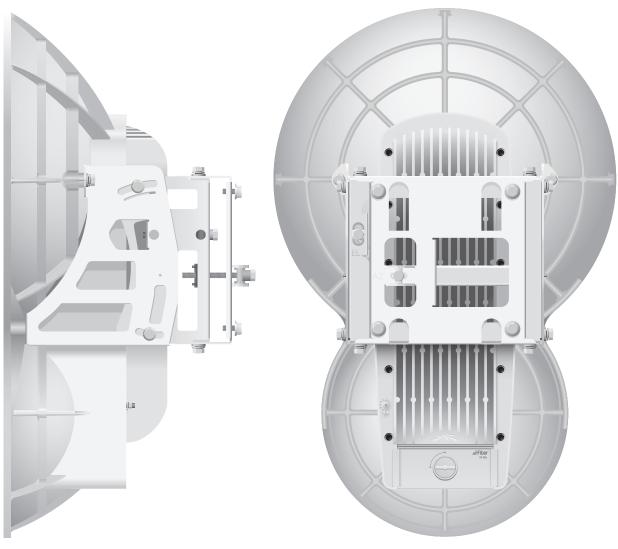

Side









Superior 24 GHz Performance

Systems for millimeter-wave frequencies typically experience RF (Radio Frequency) losses, which occur when part of the RF is lost in the switches and filters. The Ubiquiti R&D team eliminated such RF losses with separate TX and RX antennas, so the link budget is robust and airFiber AF24 has better noise figure and higher transmit power efficiency.

Robust Mechanical Assembly

Back

An independent lab has tested the airFiber mechanical assembly to meet MIL-STD-810G, a rigorous United States MIL-STD (Military Standard) that defines a variety of challenging environmental conditions. The airFiber mechanical assembly has also undergone vibration testing using an extended version of IEC 60068-2-6, an environmental standard of the IEC (International Electrotechnical Commission).

Specifications

	airFiber AF5/AF5U	
Operating Frequency		
AF5 FCC 15.247, 15.407, IC RSS 210 ETSI EN 301 893, EN 302 502 Other Regions AF5U	5470 - 5600 MHz, 5650 - 5850 MHz 5470 - 5875 MHz 5470 - 5950 MHz	
FCC 15.247, IC RSS 21 ETSI EN 302 502 Other Regions	5725 - 5850 MHz 5725 - 5875 MHz 5725 - 6200 MHz	
Dimensions	938.4 x 468.4 x 281.4 mm	
Weight	16 kg (Mount included)	
Max. Power Consumption	40 W	
Power Supply	50V, 1.2A PoE GigE Adapter (Included)	
Power Method	Passive Power over Ethernet (42-58VDC)	
Certifications	CE, FCC, IC	
Mounting	Pole Mount Kit (Included)	
Wind Loading	194 lbf @ 125 mph	
Wind Survivability	125 mph	
Operating Temperature	-40 to 55°C	
LEDs	(12) Status LEDs: Data Port Link/Activity Data Port Speed Management Port Link/Activity Management Port Speed GPS Synchronization Master/Slave Link Status Modulation Mode 0.25x to 4x, 6x, 8x, Overload Remote and Local Displays (Calibrated Signal Strength)	
Interface		
Data Port	(1) 10/100/1000 Ethernet Port	
Management Port	(1) 10/100 Ethernet Port	
Auxiliary Port	(1) RJ-12, Alignment Tone Port	
System		
Maximum Throughput	1.0+ Gbps	
Maximum Range	100+ km (Dependent on Regulatory Region)	
Packets per Second	1+ Million	
Encryption	128-Bit AES	
Forward Error Correction	164/205	
Cyclic Prefix	1/16 Fixed	
Uplink/Downlink Ratio	50% Fixed	
Radio Frame Synchronization	GPS	
Dynamic Frequency Selection AF5 AF5U	CE, FCC/IC CE, (FCC/IC Not Applicable)	

	airFiber AF5/AF5U Receive Sensitivity			
Spatial Streams	Modulation	Sensitivity	FDD Capacity*	TDD Capacity*
8x	256QAM	-65 dBm	1024 Mbps	512 Mbps
бх	64QAM	-72 dBm	768 Mbps	384 Mbps
4x	16QAM MIMO	-77 dBm	512 Mbps	256 Mbps
2x	QPSK MIMO	-83 dBm	256 Mbps	128 Mbps
1x	½ Rate QPSK xRT	-87 dBm	128 Mbps	64 Mbps
1/4X	1/4x QPSK xRT	-90 dBm	32 Mbps	16 Mbps

* FDD = (2) 50 MHz channels and TDD = (1) 50 MHz channel

airFiber AF5/AF5U Radio Frequency	
GPS	GPS Clock Synchronization
Transceiver	
EIRP	~50 dBm (Dependent on Regulatory Region and Frequency Band)
Frequency Accuracy	±2.5 ppm without GPS Synchronization ±0.2 ppm with GPS Synchronization
Channel Bandwidth	50 MHz
Modulation	256QAM MIMO 64QAM MIMO 16QAM MIMO QPSK MIMO ½ Rate QPSK xRT ¼ Rate QPSK xRT
Integrated Split Antenna	
TX Gain	23 dBi
RX Gain	23 dBi
Beamwidth	6°
Front-to-Back Ratio	70 dB
Polarity	Dual-Slant Polarization
Cross-Polarity Isolation	> 28 dB



Specifications

Operating Frequency 24.05 – 24.25 GHz Dimensions 649 x 426 x 303 mm Weight 10.5 kg (Mount Included) Max. Power Consumption 50 W Power Supply 50V, 12A POE GigE Adapter (Included) Power Method Passive Power over Ethernet (42-58 VDC) Certifications CE, FCC, IC Wind Loading 108 lbf @ 125 mph Wonting Pole Mount Kit (Included) Operating Temperature 40 to 55°C LEDs (8) Status LEDs: Data Port Speed Data Port Speed Data Port Link/Activity Data Port Speed Configuration Port Link/Activity Amount of Configuration Port Link/Activity Data Port Speed Configuration Port Link/Activity Pole Mount Sit Link Activity Modulation Mode Master/Slave RF Status RF Status Interface (1) Two-Digit LED Display Calibrated in dBm Interface (1) Two-Digit LED Display Calibrated in dBm Late Speed (1) 10/100 Ethernet Port Auxiliary Port (1) 10/100 Ethernet Port Auxiliary Port (1) 10/100 Ethernet Port Auxiliary Port (1) 10/100 Ethernet Port Maximum Range 1.4 + Gbps		airFiber AF24
Weight 10.5 kg (Mount Included) Max. Power Consumption 50 W Power Supply 50V, 1.2A POE GigE Adapter (Included) Power Method Passive Power over Ethernet (42-58VDC) Certifications CE, FCC, IC Wind Loading 108 lbf @ 125 mph Wind Survivability 125 mph Mounting Pole Mount Kit (Included) Operating Temperature -40 to 55°C LEDs (8) Status LEDs: Data Port Speed Data Port Link/Activity Data Port Link/Activity GPS Synchronization Port Speed Configuration Port Speed Configuration Port Link/Activity Maximum Port (1) 10/100/1000 Ethernet Port Configuration Port (1) 10/100/1000 Ethernet Port Auxiliary Port (1) 10/100 Ethernet Port System (1) 10/100 Ethernet Port Maximum Throughput 1.4+ Gbps Maximum Range 1.3+ km Packets per Second > 1 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed	Operating Frequency	24.05 – 24.25 GHz
Max. Power Consumption50 WPower Supply50V, 1.2A PoE GigE Adapter (Included)Power MethodPassive Power over Ethernet (42-58VDC)CertificationsCE, FCC, ICWind Loading108 lbf@125 mphWind Survivability125 mphMountingPole Mount Kit (Included)Operating Temperature40 to 55°CLEDs(B) Status LEDs: Data Port Speed Data Port Speed Data Port Configuration Port Speed Configuration Port Link/Activity GPS SynchronizationInterface(1) Two-Digit LED Display Calibrated in dBmData Port(1) 10/100/1000 Ethernet PortConfiguration Port(1) 10/100/1000 Ethernet PortAuxiliary Port(1) 10/100/1000 Ethernet PortAuxiliary Port(1) 10/100/1000 Ethernet PortMaximum Range1.4+ GbpsMaximum Throughput1.4+ GbpsMaximum Range1.3+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Dimensions	649 x 426 x 303 mm
Power Supply50V, 1.2A POE GigE Adapter (Included)Power MethodPassive Power over Ethernet (42-58VDC)CertificationsCE, FCC, ICWind Loading108 lbf@125 mphWind Survivability125 mphMountingPole Mount Kit (Included)Operating Temperature-40 to 55°CLEDs(8) Status LEDs: Data Port Speed Data Port Speed Configuration Port Link/Activity Configuration Port Link/Activity GPFS Synchronization Modulation Mode Master/Slave RF StatusInterface(1) 10/100/1000 Ethernet PortData Port(1) 10/100/1000 Ethernet PortConfiguration Port(1) 10/100/1000 Ethernet PortAuxillary Port(1) 10/100 Ethernet PortAuxillary Port(1) 10/100 Ethernet PortSystem(1) 10/100 Ethernet PortMaximum Throughput1.4+ GbpsMaximum Range1.3+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Weight	10.5 kg (Mount Included)
Power Method Passive Power over Ethernet (42-58VDC) Certifications CE, FCC, IC Wind Loading 108 lbf @ 125 mph Wind Survivability 125 mph Mounting Pole Mount Kit (Included) Operating Temperature -40 to 55°C LEDs (8) Status LEDs: Data Port Data Port Link/Activity Configuration Port Link/Activity Configuration Port Link/Activity GepS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBm Interface Data Port Configuration Port Configuration Port Configuration Port System Maximum Throughput (1) 10/100 Ethernet Port System Maximum Range 13+ km Packets per Second 51 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 108 Mounts 108 Million 180 Million 180 Million 164/205 Cyclic Prefix 108 Mounts 108 Million 180	Max. Power Consumption	50 W
Certifications CE, FCC, IC Wind Loading 108 lbf @ 125 mph Wind Survivability 125 mph Mounting Pole Mount Kit (Included) Operating Temperature -40 to 55°C LEDs LEDs LEDs LEDs LEDs LEDs LEDs LEDs	Power Supply	50V, 1.2A PoE GigE Adapter (Included)
Wind Loading 108 lbf @ 125 mph Wind Survivability 125 mph Mounting Pole Mount Kit (Included) Operating Temperature -40 to 55°C LEDs (8) Status LEDs: Data Port Link/Activity Configuration Port Speed Data Port Link/Activity Configuration Port Speed Configuration Port Speed Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBm Interface Data Port (1) 10/100/1000 Ethernet Port Configuration Port Configuration Port (1) 10/100 [Thernet Port Auxiliary Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput 1.4+ Gbps Maximum Range 13+ km Packets per Second > 1 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed	Power Method	Passive Power over Ethernet (42-58VDC)
Wind Survivability125 mphMountingPole Mount Kit (Included)Operating Temperature-40 to 55°CLEDs(8) Status LEDs: Data Port Link/Activity Configuration Port Speed Data Port Link/Activity Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBmInterface(1) 10/100/1000 Ethernet PortData Port(1) 10/100 [Thernet PortConfiguration Port(1) 10/100 Ethernet PortAuxiliary Port(1) 17-12, Alignment Tone PortSystem(1) RJ-12, Alignment Tone PortMaximum Throughput1.4+ GbpsMaximum Range1.3+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Certifications	CE, FCC, IC
MountingPole Mount Kit (Included)Operating Temperature-40 to 55°CLEDs(8) Status LEDs: Data Port Speed Data Port Link/Activity Configuration Port Speed Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBmInterface(1) 10/100/1000 Ethernet PortData Port(1) 10/100/1000 Ethernet PortConfiguration Port(1) 10/100 Ethernet PortAuxiliary Port(1) RJ-12, Alignment Tone PortSystem(1) RJ-12, Alignment Tone PortMaximum Throughput1.4+ GbpsMaximum Range1.3+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Wind Loading	108 lbf @ 125 mph
Derating Temperature LEDs (8) Status LEDs: Data Port Speed Data Port Link/Activity Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBm Interface Data Port (1) 10/100/1000 Ethernet Port Configuration Port Auxiliary Port (1) 10/100 Ethernet Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput Auximum Range 13+ km Packets per Second Encryption Encryption Encryption Forward Error Correction (8) Status LEDs: Data Port (8) Status LEDs: Data Port Link/Activity Configuration Port (1) 10/100/1000 Ethernet Port (1) 10/100/1000 Ethernet Port (1) 10/100 Ethernet Port (1) RJ-12, Alignment Tone Port System 1.4+ Gbps Aximum Range 13+ km Packets per Second 13+ km Packets per Second 1-1 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix	Wind Survivability	125 mph
LEDS (8) Status LEDs: Data Port Speed Data Port Link/Activity Configuration Port Speed Configuration Port Speed Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBm Interface Data Port (1) 10/100/1000 Ethernet Port Configuration Port (1) 10/100 Ethernet Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput 1.4+ Gbps Maximum Range 13+ km Packets per Second 5 1 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed	Mounting	Pole Mount Kit (Included)
Data Port Speed Data Port Link/Activity Configuration Port Link/Activity Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status (1) Two-Digit LED Display Calibrated in dBm Interface Data Port (1) 10/100/1000 Ethernet Port Configuration Port (1) 10/100 Ethernet Port (1) 10/100 Ethernet Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput (1) RJ-12, Alignment Tone Port System Maximum Range (1) A+ Gbps Maximum Range (1) A+ Mm Packets per Second (1) RJ-12, Alignment Tone Port Spread (1) RJ-12, Align	Operating Temperature	-40 to 55°C
Data Port (1) 10/100/1000 Ethernet Port Configuration Port (1) 10/100 Ethernet Port (1) 10/100 Ethernet Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput 1.4+ Gbps Maximum Range 13+ km Packets per Second 51 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed		Data Port Speed Data Port Link/Activity Configuration Port Speed Configuration Port Link/Activity GPS Synchronization Modulation Mode Master/Slave RF Status
Configuration Port (1) 10/100 Ethernet Port Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput 1.4+ Gbps Maximum Range 13+ km Packets per Second 51 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1,116 Fixed	Interface	
Auxiliary Port (1) RJ-12, Alignment Tone Port System Maximum Throughput 1.4+ Gbps Maximum Range 13+ km Packets per Second 51 Million Encryption 128-Bit AES Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed		()
System Maximum Throughput Maximum Range Packets per Second Encryption Encryption Cyclic Prefix System 1.4+ Gbps 1.3+ km 1.3+ km 1.4+ Gbps 1.4+	*	• •
Maximum Throughput1.4+ GbpsMaximum Range13+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Auxiliary Port	(1) RJ-12, Alignment Tone Port
Maximum Range13+ kmPackets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	•	
Packets per Second> 1 MillionEncryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Maximum Throughput	1.4+ Gbps
Encryption128-Bit AESForward Error Correction164/205Cyclic Prefix1/16 Fixed	Maximum Range	13+ km
Forward Error Correction 164/205 Cyclic Prefix 1/16 Fixed	Packets per Second	> 1 Million
Cyclic Prefix 1/16 Fixed	Encryption	128-Bit AES
·	Forward Error Correction	164/205
Uplink/Downlink Ratio 50% Fixed	Cyclic Prefix	1/16 Fixed
	Uplink/Downlink Ratio	50% Fixed

airFiber AF24 Receive Sensitivity			
Modulation	Sensitivity	FDD Capacity*	TDD Capacity*
64QAM	-66 dBm	1500 Mbps	760 Mbps
16QAM	-72 dBm	1000 Mbps	507 Mbps
QPSK MIMO	-78 dBm	500 Mbps	253 Mbps
QPSK SISO	-80 dBm	250 Mbps	127 Mbps
1/4x QPSK SISO	-87 dBm	62.5 Mbps	31.7 Mbps

^{*} FDD = (2) 100 MHz channels and TDD = (1) 100 MHz channel

airFiber AF24 Radio Frequency		
GPS	GPS Clock Synchronization	
Transceiver		
EIRP	~33 dBm (FCC/IC), ~20 dBm (CE)	
Frequency Accuracy	± 2.5 ppm without GPS Synchronization ± 0.2 ppm with GPS Synchronization	
Channel Bandwidth	100 MHz	
Operating Channels	24.1 GHz, 24.2 GHz	
Modulation	64QAM MIMO 16QAM MIMO QPSK MIMO QPSK SISO 1/4x QPSK SISO	
Integrated Split Antenna		
TX Gain	33 dBi	
RX Gain	38 dBi	
Beamwidth	< 3.5°	
Front-to-Back Ratio	70 dB	
Polarity	Dual-Slant Polarization	
Cross-Polarity Isolation	> 28 dB	





www.ubnt.com