



外觀圖

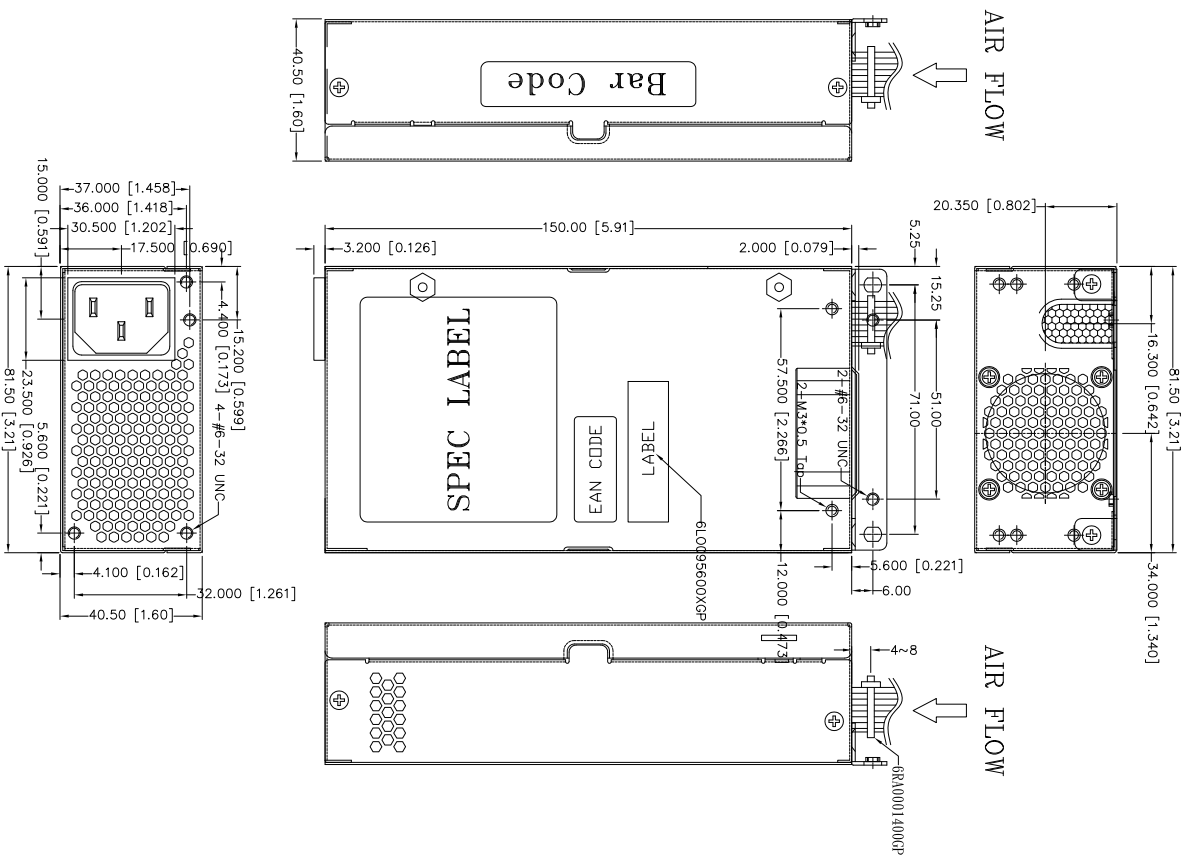

1 出線同 9PA1806202

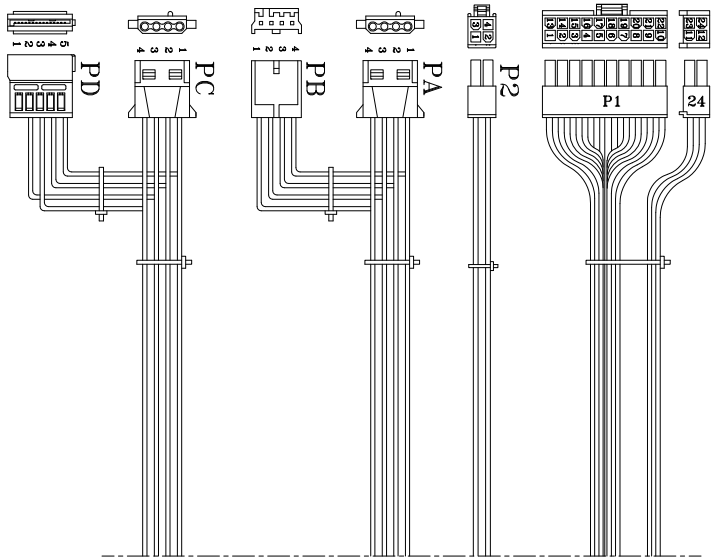

REF. D. NO.	REF. D. NO.	SIGNAL CODE	WIRE COLOR	GALV.	CONDUCTOR	LENGTH
P1	1	+3.3V	ORANGE	20	WST	200±15
	2	+3.3V	ORANGE	20	WST	200±15
	3	COM	BLACK	20	P4-10022 (11D)	
	4	+5V	RED	20	+P4-10022 (11D)	
	5	COM	BLACK	20	or RQUV.	
	6	+5V	RED	20		
	7	COM	BLACK	20		
	8	PM-OK	GRAY	22		
	9	+5Vsb	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	22		
	14	+3.3V	BROWN	22		
	15	-12V	BLU	22		
	16	COM	BLACK	22		
	17	PS-ON	GREEN	22		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20	COM	BLACK	20		
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BLACK	20		
P2	1	COM	BLACK	20	MOLEX 310±15	
	2	COM	BLACK	20	39-01-2040	
	3	+12V	YELLOW	20	or RQUV.	
	4	+12V	YELLOW	20		
PA	1	+12V	YELLOW	20	WST 250±15	
	2	COM	BLACK	20	P4-10022	
	3	COM	BLACK	20	or RQUV.	
	4	+5V	RED	20		
PB	1	+5V	RED	20	AMP 150±10	
	2	COM	BLACK	20	171822-4	
	3	COM	BLACK	20	or RQUV.	
	4	+12V	YELLOW	20		
PC	1	+12V	YELLOW	20	WST 310±15	
	2	COM	BLACK	20	P4-10022	
	3	COM	BLACK	20	or RQUV.	
	4	+5V	RED	20		
PD	1	COM	BLACK	20	MOLEX 150±10	
	2	COM	BLACK	20	900782	
	3	+5V	RED	20	or RQUV.	
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		

P/N.: 9PA1806203

NOTE:

- ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
- 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP180-50FER(F040001)	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	PE	DRAWN	DATE
		周書宇	FEB.19.2020
INTERIOR COUNTERSIGN:			