



MECHANICAL DRAWING

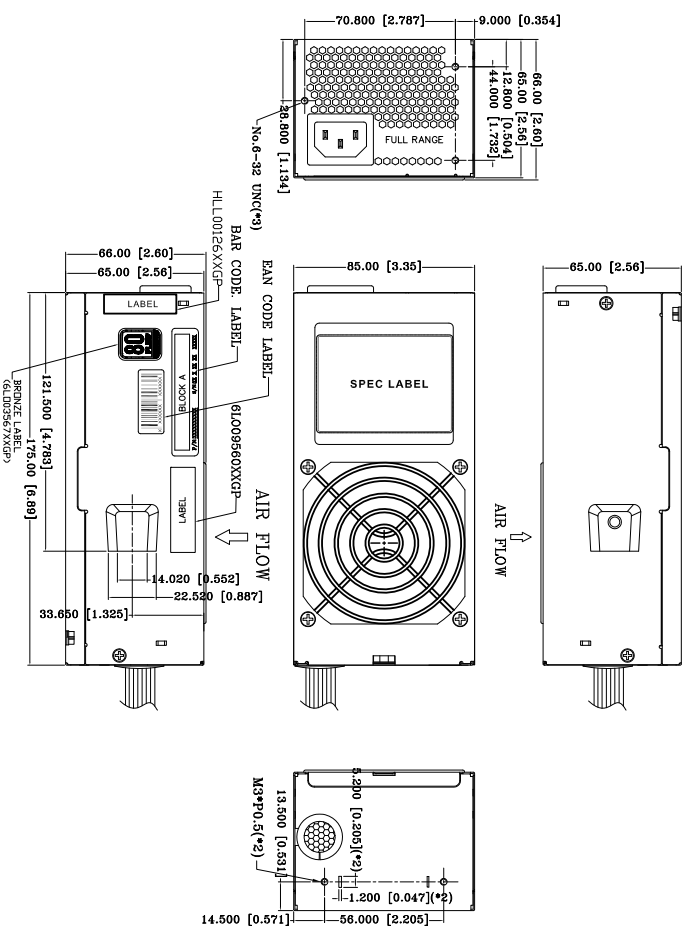

REF. ID.	R/W	SIGNAL.	WIRE	GAUGE	CONNECTOR	CABLE LENGTH
1	+	+3.3VDC	ORANGE	20	AMP	400 ±10 mm
2	+	+3.3VDC	ORANGE	20	P04-400001ID	
3	COM	BLACK	BLACK	18	P4-400001ID	
4	+	+5VDC	RED	20	or EQUIV.	
5	COM	BLACK	BLACK	18		
6	+	+5VDC	RED	20		
7	COM	BLACK	BLACK	18		
8	PM-OK	GRAY	GRAY	24		
9	+5Vsb	PURPLE	PURPLE	20		
10	+12V1	YELLOW	YELLOW	18		
11	+12V1	YELLOW	YELLOW	18		
12	+3.3VDC	ORANGE	ORANGE	20		
13	+3.3Vsense	BROWN	BROWN	24		
14	-12VDC	BLUE	BLUE	24		
15	COM	GREEN	GREEN	24		
16	PS-ON	BLACK	BLACK	24		
17	COM	BLACK	BLACK	18		
18	COM	BLACK	BLACK	18		
19	COM	BLACK	BLACK	18		
20						
21	+	+5VDC	RED	20		
22	+	+5VDC	RED	20		
23	+	+5VDC	RED	20		
24	COM	BLACK	BLACK	18		

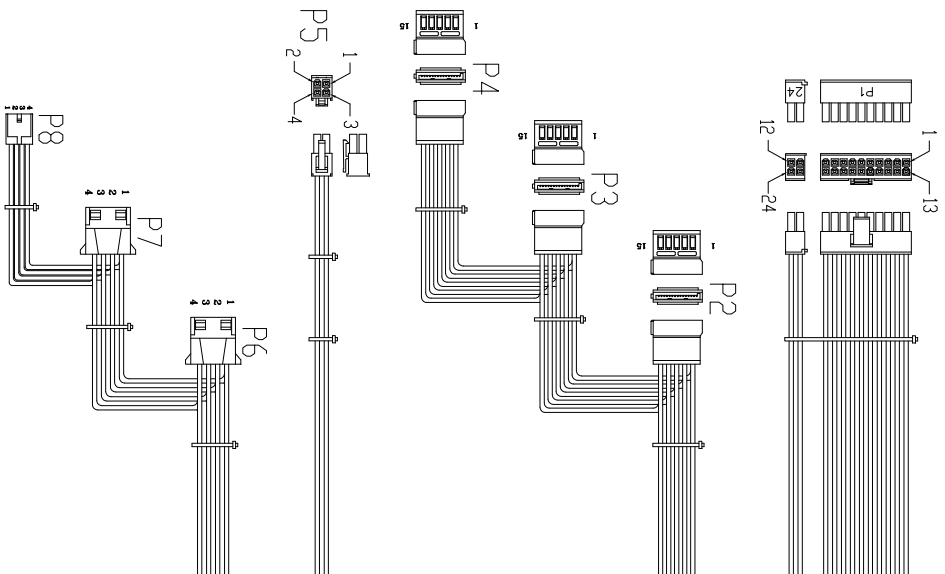

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].

UNIT:mm [inch]

P/N.:9PA300CZ21

MODEL NO. :JSP300-60GHR(65)F(PO4003)	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(8)	PE	DRAWN	DATE
			MAY.20.2016