

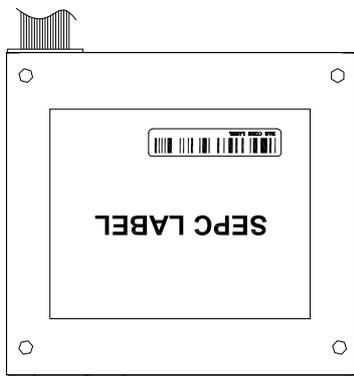
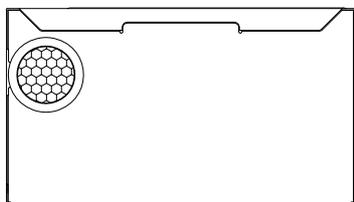
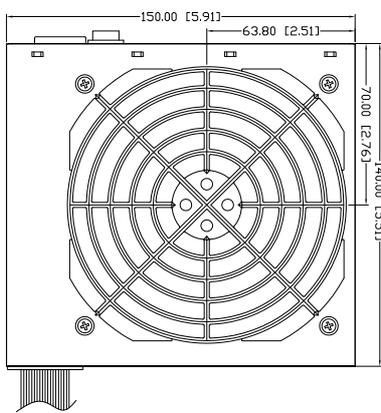


MECHANICAL DRAWING

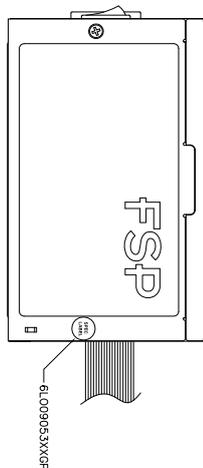

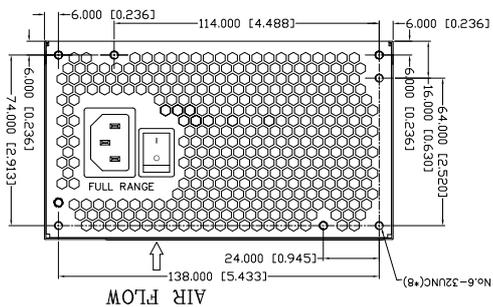


- NOTE:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].
 4. P1 為 UL1007 線; 其他為 UL2468 黑色排線.

P/N: PPA7502301

UNIT: mm/inch

MODEL NO.: RA2-750(STD002)	TYPE: ASSY	SHEET: 1 OF 2
R&D	FE	DATE
INTERIOR CONVERSION:	DRAWN	7/18/2016

REF. ID/NO	PIN SIGNAL	WIRE COLOR	PAUOFF	CONNECTOR TYPE	CABLE LENGTH
P1 /	1 +3.3VDC	BLACK	18	WST	600±10mm
	2 +3.3VDC	BLACK	18	P24-142002BK10B-BH	
	3 COM	BLACK	18	P24-142002BK10B-BH	
	4 +5VDC	BLACK	18	AMP	
	5 COM	BLACK	18	AMP	
24	6 +5VDC	BLACK	18	AMP	600±10mm
	7 PW_OK	BLACK	18	AMP	
	8 +5VSB	BLACK	18	AMP	
	9 +5VSB	BLACK	18	AMP	
	10 +12V	BLACK	24	AMP	
	11 +12V	BLACK	18	AMP	
	12 +3.3VDC	BLACK	18	AMP	
	13 +3.3VDC	BLACK	18	AMP	
	14 -12VDC	BLACK	24	AMP	
	15 COM	BLACK	18	AMP	
16 PS_ON#	BLACK	24	AMP		
17 COM	BLACK	18	AMP		
18 COM	BLACK	18	AMP		
19 COM	BLACK	18	AMP		
20 COM	BLACK	18	AMP		
21 +5VDC	BLACK	18	AMP		
22 +5VDC	BLACK	18	AMP		
23 +5VDC	BLACK	18	AMP		
24 COM	BLACK	18	AMP		
P2	1 COM	BLACK	18	WST	600±10mm
	2 COM	BLACK	18	P4-142002BK19+	
	3 COM	BLACK	18	P4-142002BK49	
	4 COM	BLACK	18	or EQUIV.	
P3	1 +12V	BLACK	18	WST	400±10mm
	2 +12V	BLACK	18	P8-142002K21B-B	
	3 +12V	BLACK	18	or EQUIV.	
	4 COM	BLACK	18	or EQUIV.	
P4	1 +12V	BLACK	20	WST	150±10mm
	2 +12V	BLACK	20	P8-142002K21B-B	
	3 +12V	BLACK	20	or EQUIV.	
	4 COM	BLACK	20	or EQUIV.	
P5	1 +12V	BLACK	20	WST	155±10mm
	2 +12V	BLACK	20	P5-112702T00M	
	3 +12V	BLACK	20	or EQUIV.	
	4 COM	BLACK	20	or EQUIV.	
P6	1 +12V	BLACK	20	WST	155±10mm
	2 +12V	BLACK	20	P5-112702T00M	
	3 +12V	BLACK	20	or EQUIV.	
	4 COM	BLACK	20	or EQUIV.	
P7	1 +3.3VDC	BLACK	20	WST	450±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C	
	4 COM	BLACK	20	or EQUIV.	
P8	1 +12V	BLACK	20	WST	155±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C	
	4 COM	BLACK	20	or EQUIV.	
P9	1 +3.3VDC	BLACK	20	WST	155±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C1	
	4 COM	BLACK	20	or EQUIV.	
P10	1 +12V	BLACK	20	AMP	155±10mm
	2 COM	BLACK	20	1-1480424-0	
	3 +12V	BLACK	20	or EQUIV.	
	4 +5VDC	BLACK	20	AMP	
P11	1 +5VDC	BLACK	20	AMP	100±10mm
	2 COM	BLACK	20	171822-4	
	3 +12V	BLACK	20	or EQUIV.	
	4 +12V	BLACK	20	AMP	
P12	1 +12V	BLACK	20	AMP	100±10mm
	2 COM	BLACK	20	1-1480424-0	
	3 COM	BLACK	20	or EQUIV.	
	4 +5VDC	BLACK	20	AMP	
P13	1 +3.3VDC	BLACK	20	WST	155±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C	
	4 COM	BLACK	20	or EQUIV.	
P14	1 +3.3VDC	BLACK	20	WST	155±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C1	
	4 COM	BLACK	20	or EQUIV.	
P15	1 +12V	BLACK	20	AMP	155±10mm
	2 COM	BLACK	20	1-1480424-0	
	3 +12V	BLACK	20	or EQUIV.	
	4 +5VDC	BLACK	20	AMP	
P16	1 +12V	BLACK	20	AMP	100±10mm
	2 COM	BLACK	20	1-1480424-0	
	3 COM	BLACK	20	or EQUIV.	
	4 +5VDC	BLACK	20	AMP	
P20	1 +3.3VDC	BLACK	20	WST	155±10mm
	2 COM	BLACK	20	P5-112702T00M	
	3 +5VDC	BLACK	20	P5-112702C	
	4 COM	BLACK	20	or EQUIV.	

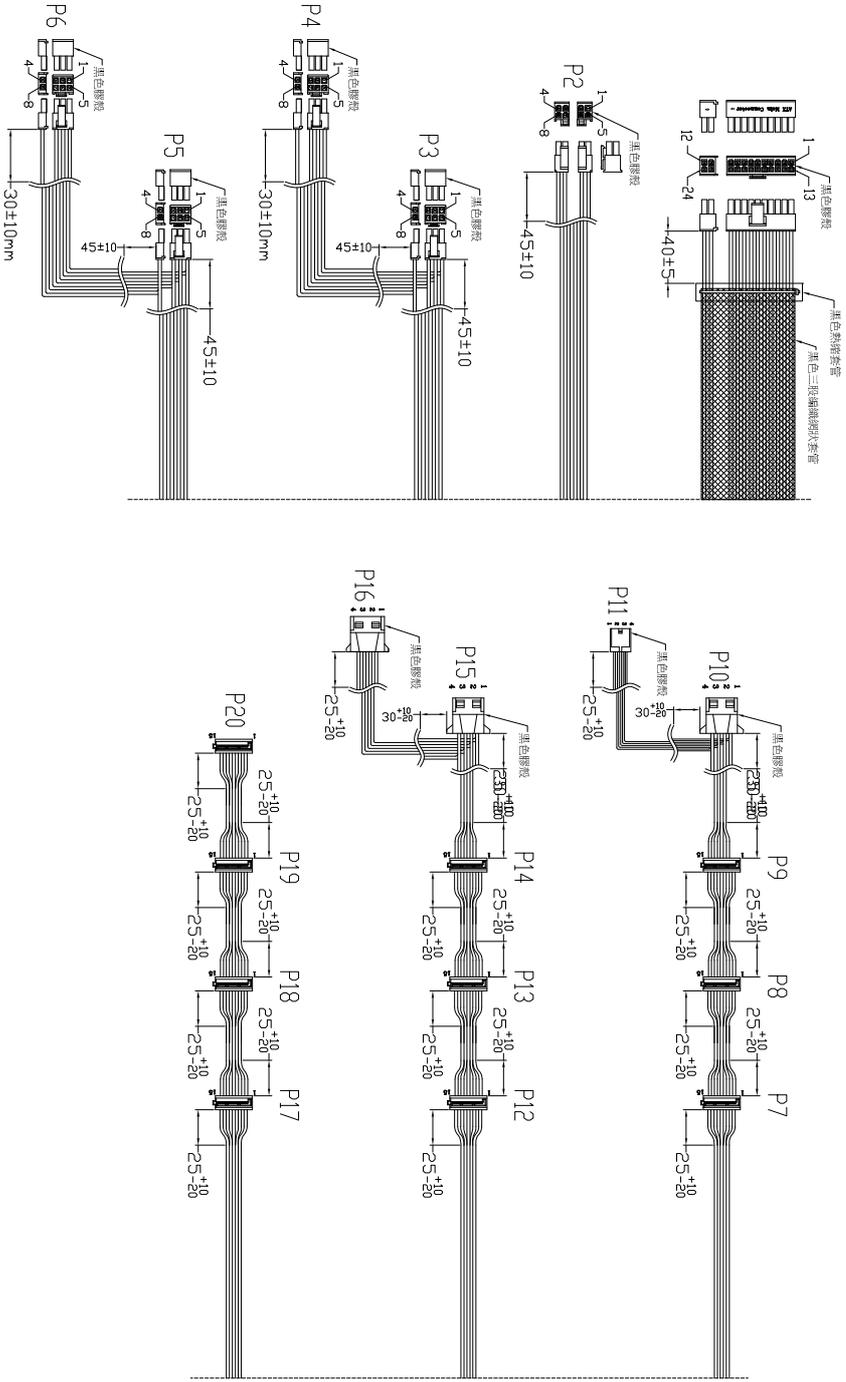

UNIT:mm/inch

MODEL NO. : RA2-750(STD002)	TITLE: ASSY	SHEET: 2 of 2
REV: 01	DATE: 7/18/2016	
DESIGNER: DRAMN	DRAWN: DRAMN	
INTERIOR CONVERSION:		

P/N: PPA7502301